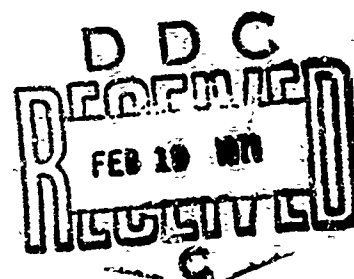AFCRL—70—0707

AD718428

DEPARTMENT OF ELECTRICAL ENGINEERING
Colorado State University
Fort Collins, Colorado 80521

CAUSES, EFFECTS AND
DIAGNOSTIC MEASUREMENTS OF
THE REENTRY PLASMA SHEATH

By James P. Rybak

D D C
FEB 19 1971

Reproduced by
NATIONAL TECHNICAL
INFORMATION SERVICE
Springfield, Va. 22151

Contract No. F19628—70—C—0035   Project No. 7260

PROJECT THEMIS

Scientific Report No. 1   December 1970

PREPARED FOR

AIR FORCE CAMBRIDGE RESEARCH LABORATORIES
AIR FORCE SYSTEMS COMMAND   UNITED STATES AIR FORCE
BEDFORD, MASSACHUSETTS 01730

65

Qualified requestors may obtain additional copies from the Defense
Documentation Center. All others should apply to the Clearinghouse
for Federal Scientific and Technical Information.

CAUSES, EFFECTS AND DIAGNOSTIC MEASUREMENTS

OF THE REENTRY PLASMA SHEATH

By

James P. Rybak

Colorado State University
Department of Electrical Engineering
Fort Collins, Colorado 80521

PROJECT THEMIS

Scientific Report No. 1

December 1970

Prepared
for

AIR FORCE CAMBRIDGE RESEARCH LABORATORIES

AIR FORCE SYSTEMS COMMAND

UNITED STATES AIR FORCE

BEDFORD, MASSACHUSETTS 01730

ABSTRACT

During entry into the earth's atmosphere of a manned or unmanned space vehicle, a plasma sheath envelops the vehicle due to shock heating of the ambient gases and ablation of the heat shield material. This plasma sheath causes the interruption of radio communications between the space vehicle and ground based stations commonly referred to as the reentry communications blackout. To solve the blackout problem, a knowledge of the reentry plasma sheath properties (electron density, electron collision frequency, electron temperature and plasma stand-off distance) is required. A summary of the causes and effects of the reentry plasma sheath is presented in this report together with a discussion of reentry plasma diagnostic techniques and a review of the flight experiments performed to determine the properties of the reentry plasma.

TABLE OF CONTENTS

LIST OF FIGURES

LIST OF TABLES

CHAPTER I

INTRODUCTION

The problems which arise during the atmospheric reentry of a
spacecraft or missile are myriad and by no means insignificant. The
primary problem associated with the reentry plasma sheath is the "com-
munications blackout" which in many cases results in a complete loss
or at least a severe decrease in the strength of radio frequency signals
between the reentry vehicle and the ground. This problem is of impor-
tance due to the loss of voice communications and data telemetry during
the reentry of manned space vehicles and the loss of electronic counter-
measures capability during the reentry of military ballistic missile
payloads (Jacavanco 1969). No less important are the concomitant
antenna electrical breakdown and antenna pattern distortion which can
also occur before and after the blackout period. This problem lasts
for up to ten minutes during what is often the most crucial part of
the vehicle's flight. The "shuttle" reentry vehicles of the future
will spend longer times in the reentry phase of flight and consequently
will experience even more prolonged periods of reentry communications
problems.

Considerable effort has been directed towards determining ways
to alleviate the problems associated with the reentry plasma sheath.
The most promising techniques to lessen the reentry plasma problem in-
volve the injection of electrophilic chemicals into the reentry plasma
flow field upstream from the antenna locations and the changing of the
plasma flow field by aerodynamic shaping (Huber and Sims 1964). These
alleviation techniques are in the developmental stage and a number of
problems still must be solved. A thorough knowledge of the plasma
sheath properties is needed in order to develop systems which can
maintain communications during reentry. Unfortunately, the reentry

1

plasma sheath is the result of chemical and thermodynamic processes which are not well understood. In addition, the conditions which control the rates at which these chemical and thermodynamic processes occur change rapidly during reentry, further complicating the picture. Consequently, a complete understanding of the plasma sheath cannot be obtained from analytical approaches. Rather, it is necessary to make accurate in-flight measurements of the reentry plasma sheath properties.

Ideally, one would like to determine continuously the spatial variation of the electron density, electron collision frequency and electron temperature in the inhomogeneous plasma sheath from the surface of the reentry vehicle out to the point where the effect of the plasma upon the electromagnetic waves of interest becomes negligible. However, the severe environmental conditions which exist at all but the earliest stages of reentry preclude the use of probes extending into the plasma to determine the spatial variation of the plasma properties. Consequently, it is highly desirable to use sensors which are flush mounted on the surface of the vehicle. These sensors do not perturb the plasma flow field and are not subject to severe environmental conditions. Unfortunately, the measurements from flush mounted sensors lack the spatial resolution of probe measurements. Nevertheless, surface mounted sensor measurements are the most practical means of determining the properties of the reentry plasma sheath.

The admittance and radiation patterns of surface mounted aperture antennas are changed markedly by the presence of a reentry plasma sheath. Consequently, measurements of aperture antenna admittance can be used to determine the properties of the reentry plasma sheath. The subject of in-flight measurements which can be related to the properties of the reentry plasma sheat is only in its elementary stages of development. Much more needs to be known about the performance of the surface mounted sensors in the reentry environment and the proper interpretation of the data acquired from them.

A summary of the causes and effects of the reentry plasma sheath is presented in this report together with a discussion of reentry plasma diagnostic techniques and a review of the flight experiments performed to determine the properties of the reentry plasma.

CHAPTER II

THE REENTRY COMMUNICATIONS PROBLEM

The purpose of this chapter is to provide an over-view of the reentry communications problem. Particular emphasis is placed on developing an understanding of 1) the causes and nature of the reentry plasma sheath, 2) the interaction between electromagnetic waves and plasmas and 3) proposed means of alleviating the reentry communications blackout. The chapter gives perspective to the need for developing means of accurately determining reentry plasma properties.

A. <u>Reentry Plasmas</u> A spacecraft entering the earth's atmosphere possesses large amounts of kinetic and potential energy due to its speed and position in the earth's gravitational field. A shock wave forms in front of the vehicle as it enters the atmosphere causing the air around the vehicle to be compressed and heated.

This shock wave coupled with atmospheric drag converts much of the space vehicle's kinetic energy into heat. This heat increases the air temperature in the stagnation region between the shock wave and the nose of the spacecraft. As a result, the air molecules become dissociated and ionized. Temperatures at the surface of the vehicle often are sufficient to ionize a portion of the ablated heat shield material. The ionized layer which envelops the spacecraft as it reenters the earth's atmosphere is called the "reentry plasma sheath."

The plasma sheath around a conic-shaped reentry vehicle can be described in terms of four flow regions as shown in Figure II-1 (Joerger and Glatt 1967).

The stagnation region is characterized by high pressure, high temperature gases separated from the reentry vehicle by a thin boundary layer and bounded by a nearly normal shock. The most severe plasma and temperature conditions occur in this region. Consequently, antennas

3
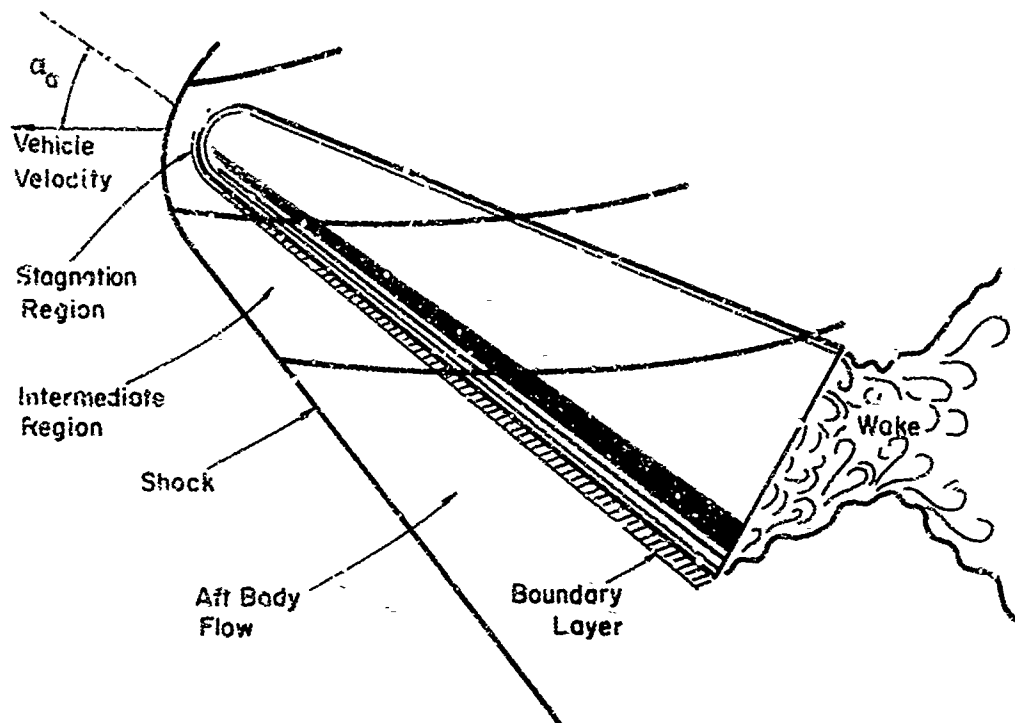
α_0 = Reentry Angle of Attack

Altitude $\approx$ 40 km

Figure II - 1.   Flow regions about a conic shaped vehicle
(Joerger and Glatt 1967, Figure 1)

are generally not located in the stagnation region. Rather, they are
located in the aft body region where the environmental conditions are
less severe.

The gases in the intermediate region are in a state of chemical
nonequilibrium. The plasma conditions in this region are not as severe
as those in the stagnation region but are responsible for the communi-
cations blackout of the aft-mounted antennas unless a high angle of
attack is maintained.

The ionization in the aft body region is primarily the result
of gases which pass through the oblique shock which bounds that region.
The plasma electron density profile is highly dependent upon the angle
of attack and the exact shape of the vehicle and becomes extremely
difficult to compute for other than simple body shapes. The plasma
conditions in the aft body region are much less severe than those in
the intermediate region (Joerger and Glatt 1967).

A viscous boundary layer exists at the surface of the reentry
vehicle. Large velocity and temperature gradients exist in this boun-
dary layer, and flow conditions are significantly different from those
in the inviscid flow regions. The ionization in the boundary layer is
important at altitudes above 75 km and its effects must be considered
(Friel and Rosenbaum 1964). Generally, however, conditions in the
inviscid flow regions beyond the boundary layer are more important than
those in the boundary layer at lower altitudes. As a result, ionization
effects in the boundary layer often can be ignored (McCabe and Stolwyk
1962).

The wake region exists behind the vehicle where electron-ion
recombination occurs at a significant rate. This region does not
usually affect communications at frequencies of 1 GHz, or higher, unless
a large amount of contaminants from the ablation of the heat shield is
present (Joerger and Glatt 1967).

The profile of the plasma sheath surrounding a typical blunt-
nosed ICBM reentry vehicle at 27 km is shown in Figure II-2. The tem-
perature and relative air density (ρ_o = sea level air density) were
obtained by analytical means but agree well with actual flight data.
Figure II-3 shows the variation of temperature and relative air density
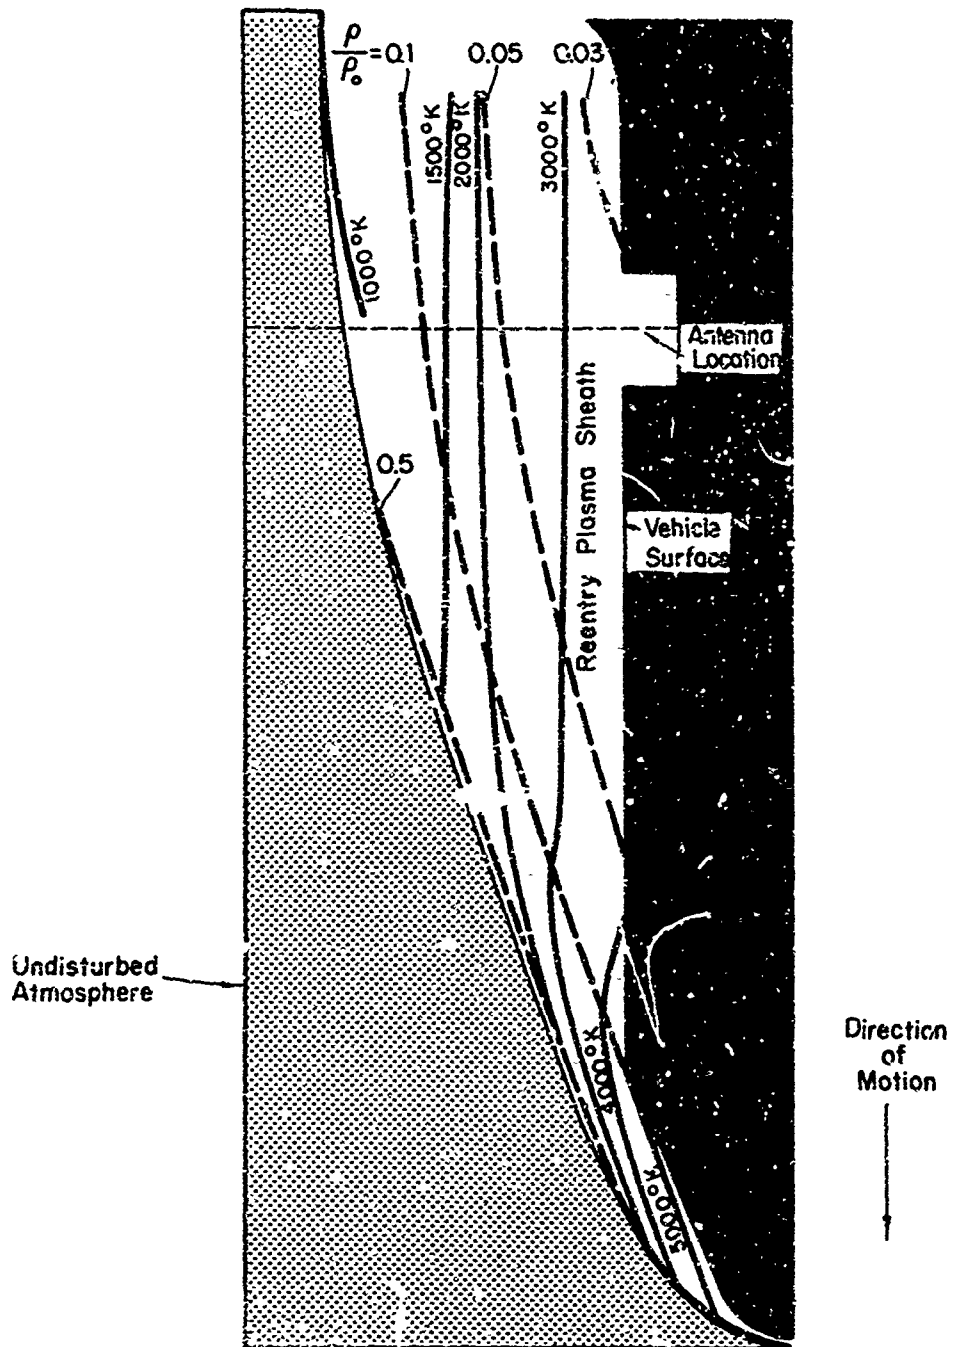
Figure II - 2   Plasma sheath surrounding a typical blunt - nosed
ICBM reentry vehicle at 27 km (Jackman et
al. 1964, Figure 1).
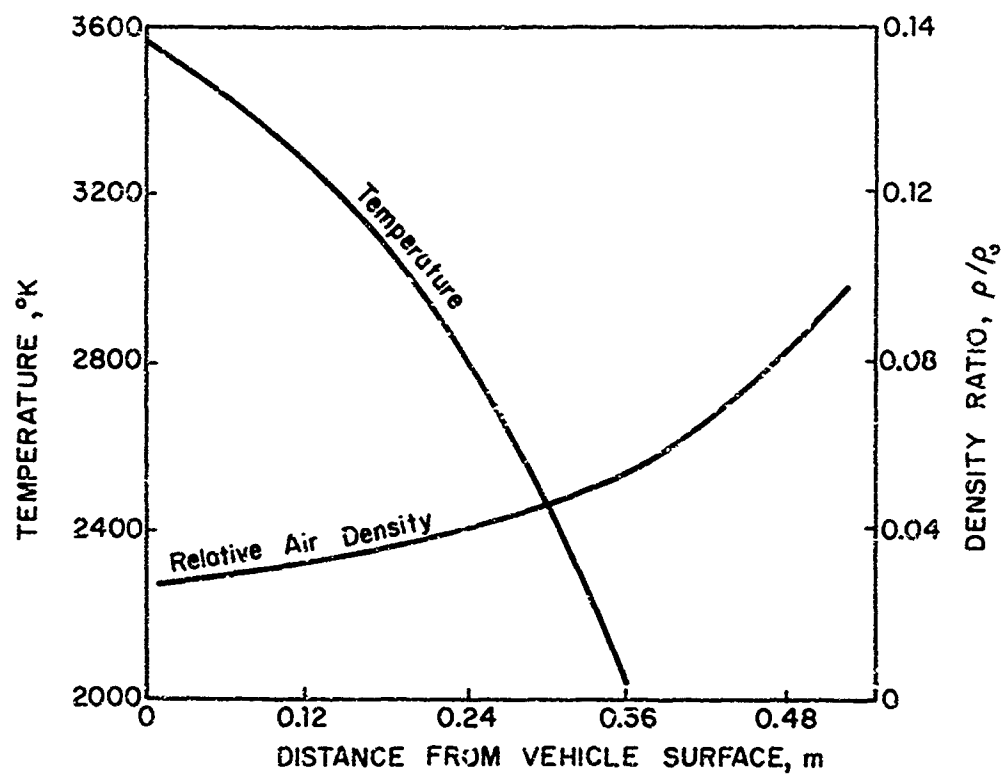
Figure II-3 Variation of temperature and relative air density at
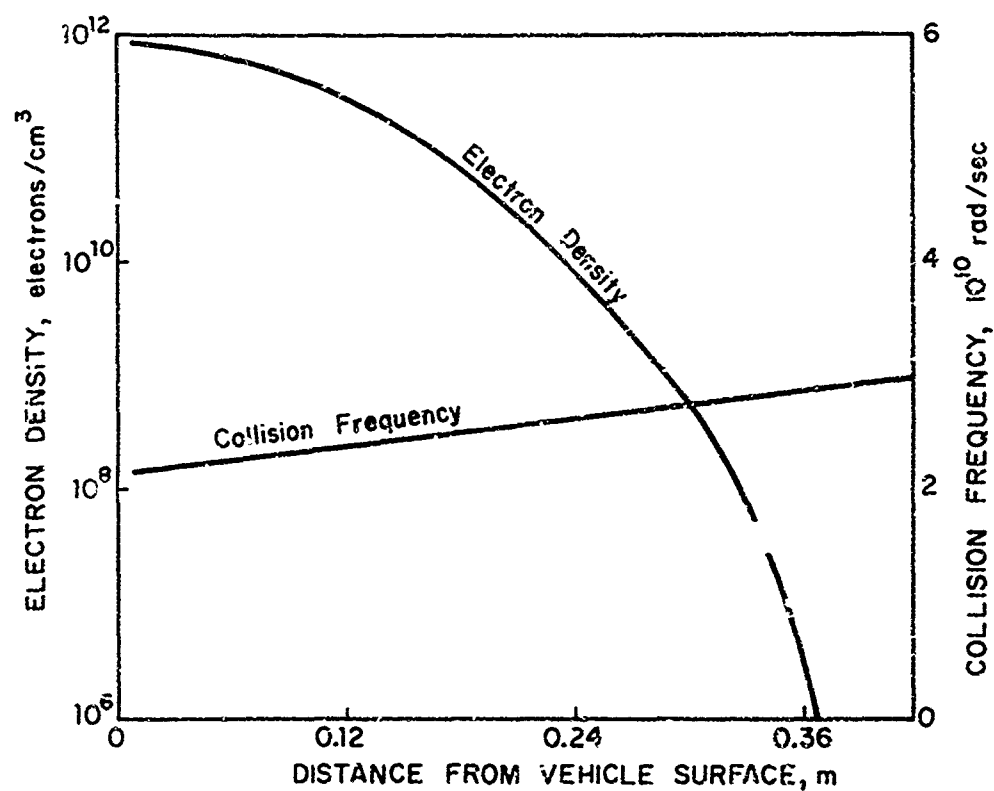antenna location (Jackman et al. 1964, Figure 2).

Figure II - 4. Variation of electron density and collision frequency
at antenna location (Jackman et al 1964, Figure 3).

radially outward from the antenna location while Figure II-4 shows the
variation of electron density and collision frequency along the same
path. The reentry plasma sheath exists at altitudes between about 120
and 15 km but the maximum electron density for this type of vehicle
occurs at about 27 km (Jackman et al. 1964).

The manned reentry vehicles in current use have a bottom surface
which approximates a flat plate as shown in Figure II-5. These vehicles
achieve a certain amount of aerodynamic lift by gliding at a compara-
tively high angle of attack. The flow field asymmetry can be seen in
Figure II-5. A stagnation point develops near the vehicle's upper
shoulder. The expanded airflow around this shoulder has an inviscid
attached flow with an essentially laminar boundary layer. However,
the airflow is unable to follow the converging vehicle contour around
the other shoulder, resulting in separated flow (Lehnert and Rosenbaum
1965).

The free electron density distribution around the aftersection
of the Apollo vehicle can be significantly different for the two types
of flow mentioned previously. The separated flow region has a circular
flow pattern which is large in extent. The flow in this region generally
contains a large amount of ablation products from the heat shield and
has a high electron concentration. The thermodynamic and chemical
states of this region are very complex and cannot be described easily.
The flow field around the shoulder having an attached flow is more
easily analyzed and the approximate electron density in the inviscid
flow region where antennas are located can be determined using conven-
tional stream tube analysis.

The plasma sheath properties for the Apollo vehicle are strongly
dependent upon the nonequilibrium conditions in the stagnation region.
Consequently, finite chemical reaction rates must be taken into account.
The expansion of the airflow at the shoulders of the Apollo vehicle
reduces electron-ion recombination and causes the electron concentration
to remain high. An accurate determination of the downstream electron
density distribution involves an analysis based on a large number of
coupled chemical reactions and flow equations. One is hampered in
attempts to solve these equations by mathematical complexities. Futher-

α_o = Reentry Angle of Attack
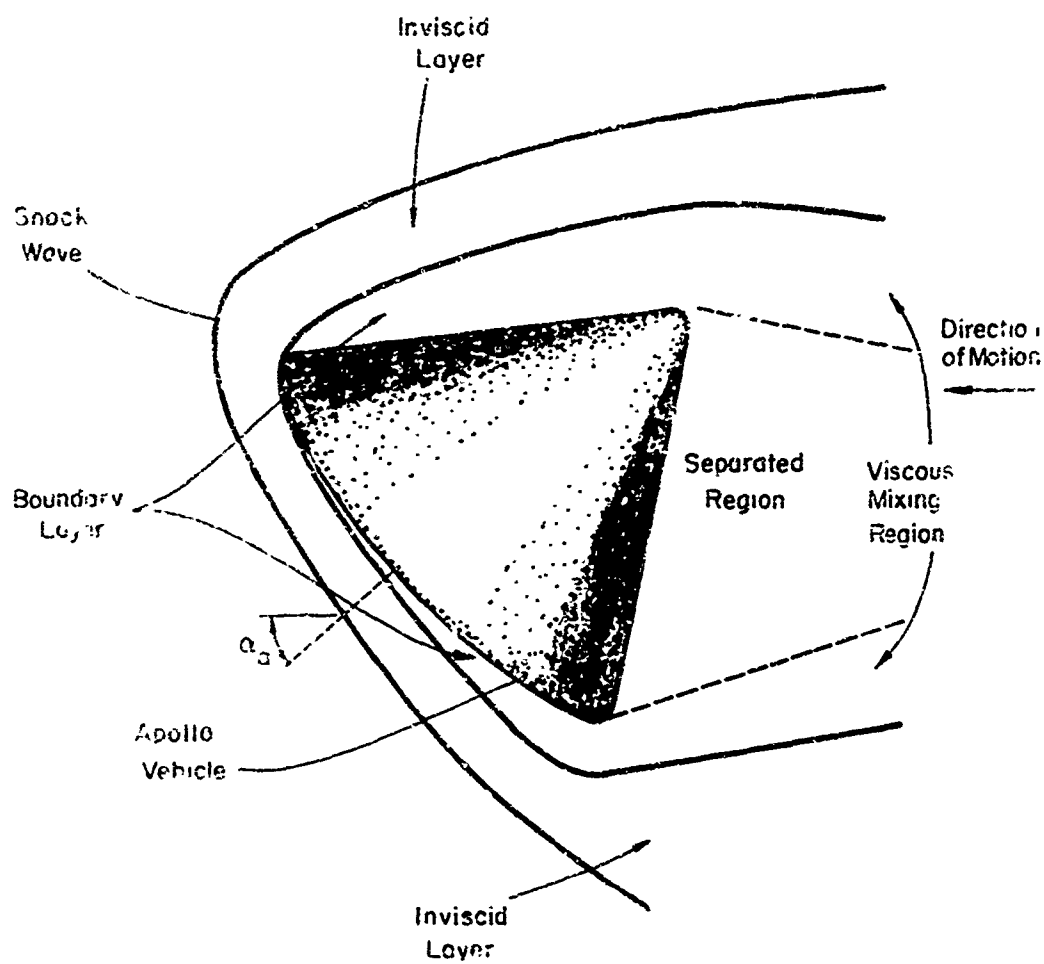
Altitude ≈ 40 km

Figure II-5 Apollo hypersonic flow regions (Lehnert and Rosenbaum 1965, Figure 7)

more the reaction constants for the chemical processes generally are
not well known (Lehnert and Rosenbaum 1965).

Scientists at the Cornell Aeronautical Laboratory have made
calculations of the nonequilibrium ionization in the forebody and near
afterbody regions of an Apollo-type vehicle entering the earth's atmos-
phere. The calculations have been made for a reentry velocity range of
12 to 5 km/sec together with the corresponding values of altitude and
angle of attack (Dunn et al. 1967; Dunn 1970). The C.A.L. calculations
do not give the plasma parameters in the afterbody region where the anten-
nas are located. Estimates of the electron density in the afterbody
region are generally obtained by extrapolating values calculated for
the forebody region and from data obtained from reentry flights. It
follows that these estimates cannot be made with a high degree of
accuracy. Consequently, it is highly desirable to make accurate measure-
ments of the plasma properties during reentry so that a complete under-
standing of the reentry plasma sheath can be obtained.

A thorough knowledge of the interaction of electromagnetic
waves with a plasma is necessary to understand 1) why the existence of
the reentry plasma sheath causes a "communications blackout", 2) how
electromagnetic sensors can be used to determine the properties of the
reentry plasma and 3) what techniques might be employed to eliminate
or at least reduce the "communications blackout" problem.

B. Electromagnetic Wave Interaction With Plasmas   The most
accurate description of the interaction between electromagnetic waves
and a plasma is based on statistical mechanics. The use of Liouville's
equation and the reduced probability distributions leads to the BBGKY
hierarchy of equations (Montgomery and Tidman 1964) which are very
difficult to apply to practical plasma problems.

A great deal of reliable information concerning the interaction
between electromagnetic waves and a plasma can be obtained using less
rigorous but more useful analyses. Insight concerning the mechanism by
which free electrons can cause electromagnetic waves to be reflected
and attenuated can be gained by employing the following simplified
microscopic approach (Huber and Sims 1964).

It is assumed that the plasma consists of equal numbers of positive ions and free electrons together with a number of neutral particles. The charged particles maintain an average equilibrium separation distance due to their electrostatic fields. If one of the charged particles is displaced from its equilibrium position and the other charges remain fixed, the displaced charge will oscillate about its equilibrium position in the manner of a mass on a spring. The particle is the "mass", the restoring electrostatic force due to the neighboring charged particles in the "spring", and the collisions of the oscillating charge with the neutral particles constitute the damping. The frequency of oscillation of the charged particle is called the "plasma frequency". It is the natural frequency of a free charge in a plasma. The radian plasma frequency ω_p for electrons in the plasma is defined by the relation

$$\omega_p = \sqrt{\frac{N_o e^2}{\varepsilon_o m_e}} \qquad (\text{II-1})$$

where N_o is the number of electrons per unit volume, $-e$ is the electronic charge, m_e is the mass of the electron and ε_o is the permittivity of free space.

An equation analagous to equation (II-1) can be used to determine the plasma frequency for the ions. The electron plasma frequency is seen to be proportional to the square root of the electron density. Since the ion mass is about four orders of magnitude larger than the electron mass, the ion plasma frequency is much smaller than the electron plasma frequency for a given plasma.

'In the preceding example the electron was displaced from its equilibrium position and was allowed to oscillate at the natural frequency of the plasma. An electromagnetic wave, however, acts as a periodic driving force on the electron. If the driving frequency (i.e., electromagnetic wave frequency) is considerably less than the natural frequency of the plasma electron and if collisional damping of the electron motion is small, inertial effects are small and the electron will oscillate at the driving frequency. The oscillating charge acts

as a dipole radiator producing both a forward traveling and a backward
traveling electromagnetic wave. The backward traveling wave appears as
a reflected wave while the forward traveling wave is out of phase with
and tends to cancel the driving signal. This process is repeated as
the driving signal penetrates the plasma, resulting in an attenuation
of the driving signal which increases with the thickness of the plasma.
The amplitude of the reflected wave which is observed outside the plasma
layer also increases with the thickness of the plasma layer, for thin
layers. The amplitude of the reflected wave does not increase as the
thickness of the plasma layer becomes greater than about one quarter
wavelength due to attenuation of the reflected wave in the plasma.
Increasing the collisional damping of the oscillating electron motion
reduces the strength of the backward and forward radiated wave resulting
in less reflection and attenuation of the signal wave.

The situation is completely changed when the frequency of the
electromagnetic wave is much greater than the electron plasma frequency.
The electron now exhibits large inertial effects and is able to oscillate
only weakly at the driving frequency. As a result, the electromagnetic
wave propagates unattenuated if no electron collisions occur. A slight
reflection and attenuation of the electromagnetic wave is experienced
if electron collisions do occur.

The amplitude and phase of the forward and backward wave pro-
duced by the oscillating charge is such that the incident electromagnetic
wave is totally reflected at the surface of the plasma and does not
penetrate the plasma at all when the frequency of the electromagnetic
wave is exactly equal to the electron plasma frequency and no electron
collisions occur. The occurence of electron collisions allows the elec-
tromagnetic wave to penetrate a distance into the plasma even when the
electromagnetic wave frequency is equal to the electron plasma frequency.
The significance of this discussion is that the amount of attenuation
and reflection experienced by an electromagnetic wave incident upon a
plasma layer is dependent upon the frequency of the electromagnetic wave
in relation to the electron plasma frequency. The ions in the plasma
have little effect upon electromagnetic wave propagation because the

ion plasma frequency is generally substantially below the frequency of the RF waves employed.

While the preceding discussion gives physical insight to the problem, a more quantitative description of the interaction between electromagnetic waves and a plasma is needed if one is to use electromagnetic measurements to determine the properties of a reentry plasma. A very useful description of the plasma is given in terms of its effective dielectric coefficient (Stratton 1941). An alternative, but equivalent description of the plasma can be given in terms of the plasma conductivity. This approach will be mentioned briefly for completeness.

An expression for the effective dielectric coefficient of a plasma can be obtained by considering the motion of the electrons under the influence of an RF field constitutes a polarization current. For a one dimensional problem, the polarization $\vec{P}$ is given (Plonsey and Collin 1961) by

$$|\vec{P}| = -N_o e X_e = \epsilon_o \alpha_e E \tag{II-2}$$

where X_e is the distance by which the charges are displaced from their equilibrium position, α_e is the electric susceptability of the plasma and E is the electric field which is the cause of the electron motion.

The motion of an electron under the influence of an electric field is described by the Langevin equation (Tanenbaum 1967)

$$\ddot{X}_e + \nu \dot{X}_e + \frac{e}{m_e} E = 0 \tag{II-3}$$

where ν is the electron collision frequency. It is assumed that there are no external magnetic fields present. The effect of the magnetic field associated with the time varying electric field is negligible for non-relativistic electrons. If it is assumed that both E and X_e have $\exp(-i\omega t)$ time dependencies, equation (II-3) then becomes

$$- \omega^2 X_e - i\omega\nu X_e + \frac{e}{m_e} E = 0 \quad . \tag{II-4}$$

Equation (II-4) can be rearranged to obtain

$$X_e = \frac{eE}{m_e \omega(\omega + i\nu)} \quad . \tag{II-5}$$

The electric susceptability α_e of the plasma is obtained from equations (II-2) and (II-5) in the form

$$\alpha_e = \frac{- N_o e X_e}{\varepsilon_o E} = \frac{- N_o e^2}{m_e \varepsilon_o \omega(\omega + i\nu)} \quad . \tag{II-6}$$

Using the expression given in equation (II-1) for the plasma frequency ω_p, equation (II-6) can be written

$$\alpha_e = \frac{- \omega_p^2}{\omega(\omega + i\nu)} = \frac{- \omega_p^2}{\omega^2 + \nu^2} + i \frac{\omega_p^2 \nu/\omega}{\omega^2 + \nu^2} \quad . \tag{II-7}$$

The dielectric coefficient ε of a material is defined (Plonsey and Collin 1961) by

$$\varepsilon = (1 + \alpha_e) \varepsilon_o \quad . \tag{II-8}$$

Consequently, the effective dielectric coefficient of a plasma is given by

$$\varepsilon = \left[1 - \frac{\omega_p^2}{\omega^2 + \nu^2} + i \frac{\omega_p^2 \nu/\omega}{\omega^2 + \nu^2} \right] \varepsilon_o \quad . \tag{II-9}$$

An expression for the conductivity σ of the plasma can also be obtained from the Langevin equation. This time, however, the Langevin equation is written in terms of the velocity V_e of the particle rather than in terms of its displacement. The one dimensional Langevin equation is written in the form (Friel and Rosenbaum 1964)

$$\dot{V}_e + \nu V_e + \frac{e}{m_e} E = 0 \qquad (II\text{-}10)$$

It is again assumed that no external magnetic field is present and that both E and V_e have $\exp(-i\omega t)$ time dependencies. Equation (II-10) can then be written

$$-i\omega V_e + \nu V_e + \frac{e}{m_e} E = 0 \qquad (II\text{-}11)$$

Rearranging the terms in equation (II-11) one obtains

$$V_e = \frac{-eE}{m(\nu - i\omega)} \qquad (II\text{-}12)$$

The electron conduction current density J in the plasma is given by Spitzer (1956) in the form

$$J = \sigma E = -N_o e V_e \; . \qquad (II\text{-}13)$$

The conductivity σ may be obtained from equation (II-12) and (II-13) in the form

$$\sigma = \frac{N_o e^2}{m(\nu - i\omega)} = \frac{\epsilon_o \omega_p^2}{\nu^2 + \omega^2} (\nu + i\omega) \; . \qquad (II\text{-}14)$$

When an externally applied magnetic field is present the plasma conductivity is anisotropic with respect to the magnetic field and is therefore a tensor (Heald and Wharton 1965).

It has been shown that a plasma can be described by a complex dielectric coefficient (equation (II-9)) or by a complex conductivity (equation (II-14)). It will now be shown that the two descriptions are equivalent.

The wave equation satisfied by the electric field vector $\vec{E}$ in a homogeneous, isotropic, source-free medium with permittivity ϵ, conducitivcy σ and permeability μ is (Plonsey and Collin 1961)

$$\nabla^2 \vec{E} - \mu\sigma \frac{\partial \vec{E}}{\partial t} - \mu\epsilon \frac{\partial^2 \vec{E}}{\partial t^2} = 0 \qquad \text{(II-15)}$$

Upon considering the plasma to be a medium with zero conductivity, complex permittivity ϵ (defined by equation (II-9)) and free space permeability μ_o then, assuming an $\exp(-i\omega t)$ time dependence for $\vec{E}$, equation (II-15) becomes

$$\nabla^2 E + \mu_o \epsilon_o \left[1 - \frac{\omega_p^2}{\omega^2 + \nu^2} + i \frac{\omega_p^2 \, \nu/\omega}{\omega^2 + \nu^2} \right] \omega^2 \vec{E}$$

$$= \nabla^2 \vec{E} + \mu_o \epsilon \omega^2 \dot{\vec{E}} = 0 \qquad . \qquad \text{(II-16)}$$

Alternatively, the plasma can be considered to be a medium with permeability μ_o, permittivity ϵ_o and complex conductivity σ (defined by equation (II-14)). Equation (II-15) then becomes

$$\nabla^2 E + i \frac{\omega \mu_o \epsilon_o \omega_p^2}{\nu^2 + \omega^2} \, (\nu + i\omega) \, \vec{E} + \mu_o \epsilon_o \omega^2 \vec{E}$$

$$= \nabla^2 E + \mu_o \epsilon_o \omega^2 \left[1 - \frac{\omega_p^2}{\omega^2 + \nu^2} + i \frac{\omega_p^2 \, \nu/\omega}{\omega^2 + \nu^2} \right] \vec{E}$$

$$= \nabla^2 E + \mu_o \epsilon \omega^2 \vec{E} = 0 \qquad . \qquad \text{(II-17)}$$

Equation (II-16) is seen to be identical to equation (II-17), indicating the equivalence of the two plasma descriptions.

One dimensional plane wave solutions of equation (II-16) or (II-17) are of the form

$$\vec{E} = \vec{E}_o \exp(\pm \gamma_p x) \qquad \text{(II-18)}$$

where

$$\gamma_p = ik_o (K_r + iK_i)^{\frac{1}{2}} = \alpha_p + i\beta_p \qquad \text{(II-19)}$$

and $\vec{E}_o$ is a vector constant. The attenuation coefficient α_p and the phase coefficient β_p are defined by

$$\alpha_p = k_o \left[\frac{(K_r^2 + K_i^2)^{\frac{1}{2}} - K_r}{2} \right]^{\frac{1}{2}} \tag{II-20}$$

$$\beta_p = k_o \left[\frac{(K_r^2 + K_i^2)^{\frac{1}{2}} + K_r}{2} \right]^{\frac{1}{2}} \tag{II-21}$$

with

$$K_r = 1 - \frac{\omega_p^2}{\omega^2 + \nu^2} \tag{II-22}$$

and

$$K_i = \frac{\omega_p^2 \, \nu/\omega}{\omega^2 + \nu^2} \quad . \tag{II-23}$$

The sign associated with γ_p in equation (II-18) must be chosen so that the radiation condition (Sommerfield 1952) is satisfied.

Consider the case of a collisionless plasma (i.e., $\nu = 0$). Then K_i and α_p are both identically zero and

$$\vec{E} = \vec{E}_o \exp(\pm i k_o K_r^{\frac{1}{2}} x). \tag{II-24}$$

If the wave frequency ω is greater than the plasma frequency ω_p, $K_r^{\frac{1}{2}}$ is real and the wave propagates without attenuation. For values of ω less than ω_p, K_r is negative and

$$\vec{E} = \vec{E}_o \exp(- k_o |K_r^{\frac{1}{2}}| x) \quad . \tag{II-25}$$

Equation (II-25) is the equation of an exponentially decaying wave. The value of K_r is zero when ω is equal to ω_p. Hence α_p and β_p are also zero indicating that the electromagnetic wave does not propagate

in the plasma. Rather, the wave is totally reflected at the surface of the plasma.

A plasma with a significant electron collision frequency does not exhibit the three distinct types of wave plasma interaction described above. A non-zero value for K_i now exists at all frequencies. Consequently, equation (II-18) now describes a plane wave which propagates with attenuation. The value of K_i, and hence α_p, generally decreases as the frequency of the wave increases. However, this is not always the situation at low frequencies when the electron collision frequency becomes greater than the signal frequency. Reducing the signal frequency reduces attenuation somewhat in such cases. The variation of α_p and β_p with signal frequency and collision frequency for a typical plasma is shown in Figures II-6 and II-7.

It has been shown that severe electromagnetic wave attenuation occurs when the electromagnetic wave frequency is less than the plasma frequency. Communications channels between the reentry vehicle and ground generally operate at frequencies in the UHF region (300-3000 MHz) and in the microwave S-band (2.6-3.95 GHz) and C-band (3.95-5.85 GHz). Figure II-8 indicates the calculated value of the plasma frequency experienced at several locations on the MA-6 Mercury series earth orbital vehicle. In this figure f_{p_s} is the stagnation point plasma frequency and $f_p^{(-2.5)}$ is the plasma frequency for the C-band antenna location obtained with calculations based upon actual in-flight-measured C-band signal attenuation. The plasma frequency $f_p^{(-2.7)}$ at the telemetry antennas was obtained from C-band data modified by the assumed longitudinal electron density variation between the C-band and telemetry antennas. Points P_1 and P_2 are the intersects of curve C with the 260 MHz line. These intersects occur at altitudes of 92 and 38 km and give the VHF blackout bounds which agree reasonably well with flight observations.

The maximum electron density at the stagnation point of the MA-6 reentry vehicle was about 5×10^{13} cm^{-3} while the maximum electron density at the antenna location was about 2×10^{11} cm^{-3}. These electron densities correspond to a plasma frequency of about 60 GHz and 4 GHz,
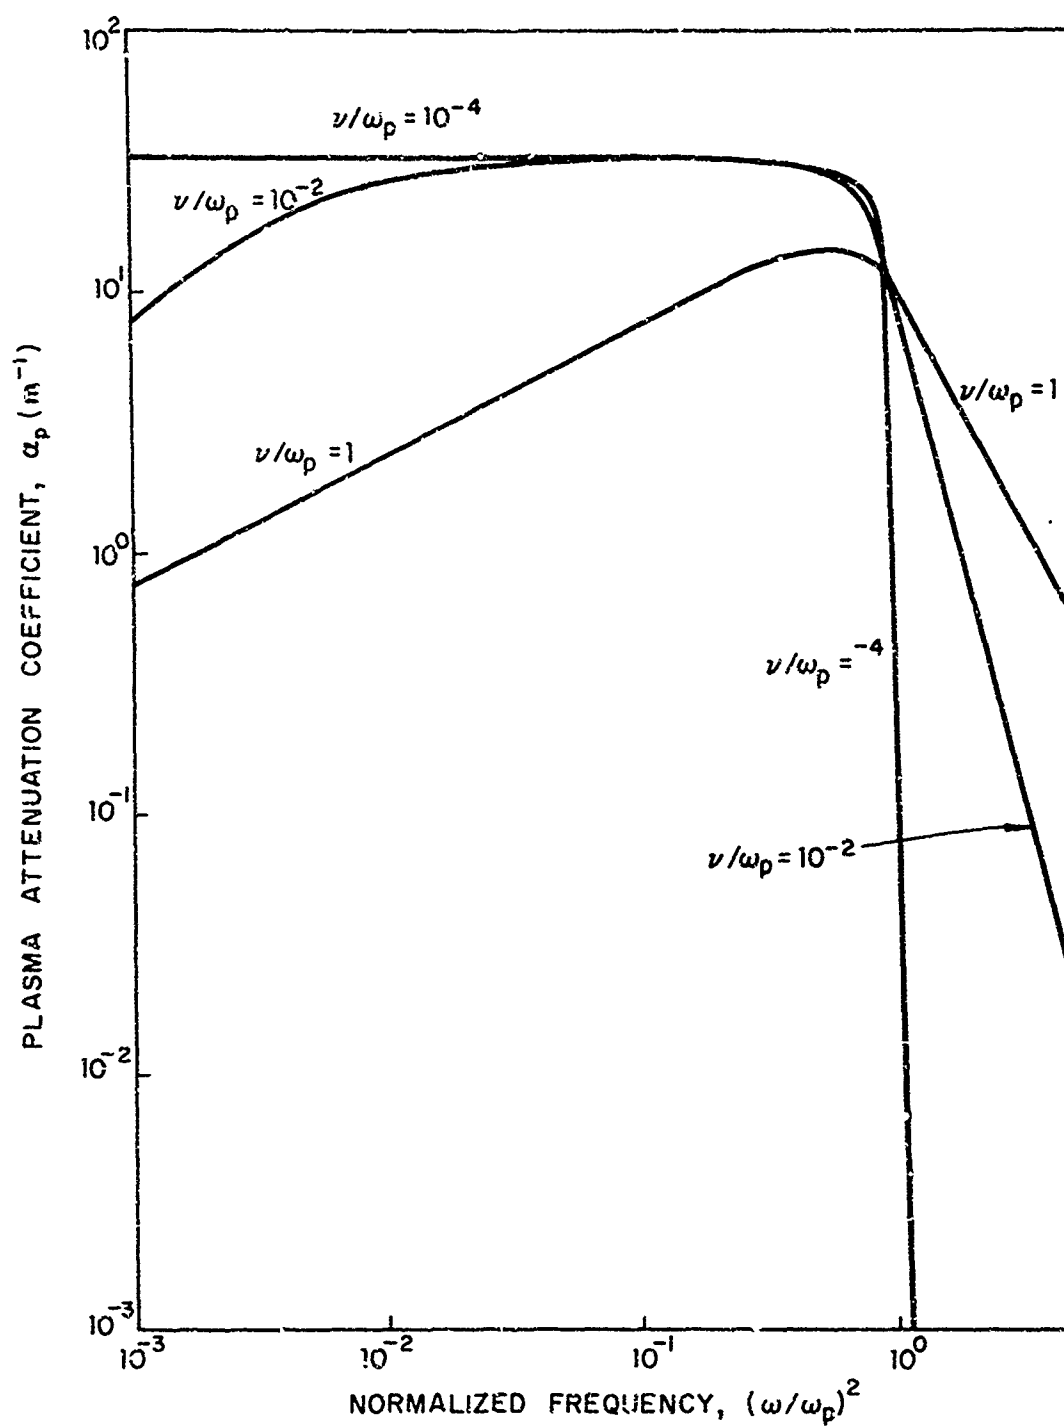
Figure II - 6   Plasmu attenuation coefficient.
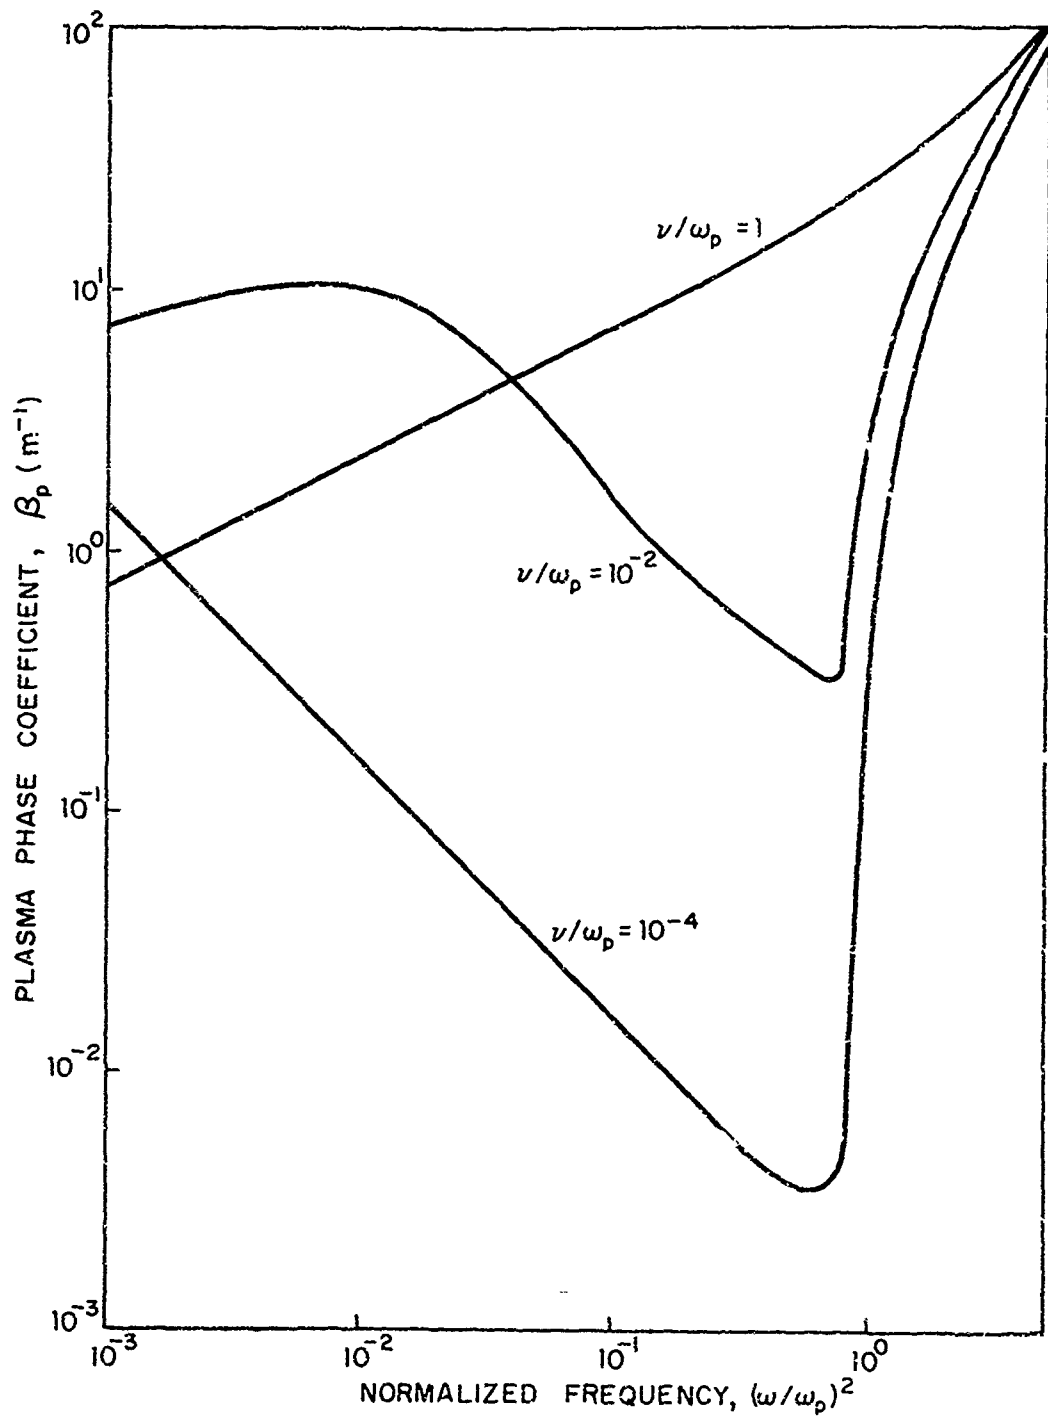
Figure II - 7   Plasma phase coefficient.

respectively. Both of these maximum values occurred at an altitude of about 40 km. The electron collision frequency at the stagnation point was calculated to be about an order of magnitude smaller than the plasma frequency at all altitudes. A higher electron density and hence plasma frequency occurs during the reentry of the Apollo vehicle because the Apollo reentry velocity, 11 kilometers per second, is considerably greater than the Mercury or Gemini reentry velocity, 7 kilometers per second. The maximum plasma frequency for the Apollo vehicle occurs at an altitude of about 45 km and is about 250 GHz at the stagnation point and about 15 GHz at the antenna location (Lehnert and Rosenbaum 1965).

The peak plasma frequency experienced by the ballistic missile reentry vehicle shown in Figure II-2 was about 10 GHz. This plasma frequency is greater than the frequencies of the electronic counter-measures systems on board the vehicle used for jamming enemy radar. These electronic countermeasures systems thus become inoperative during a portion of the reentry flight.

It would seem logical, at first thought, that the reentry com-munications blackout period could be reduced or eliminated altogether by increasing the power delivered to the antennas on the reentry vehicle. However, the large electric fields associated with high RF powers often produce an electrical breakdown of the atmosphere at the surface of the antenna. The electrical breakdown is facilitated by the high temperatures and partial ionization of the air which exist already at the surface of the antenna. This antenna breakdown phenomenon further aggravates the communications blackout problem.

Studies have shown that there is a maximum amount of power that can be transmitted regardless of the amount of incident power (Epstein 1967; Chown et al. 1967).

The need of overcoming the reentry communications blackout problem is obvious. Several techniques for alleviating this problem are discussed in the following section.
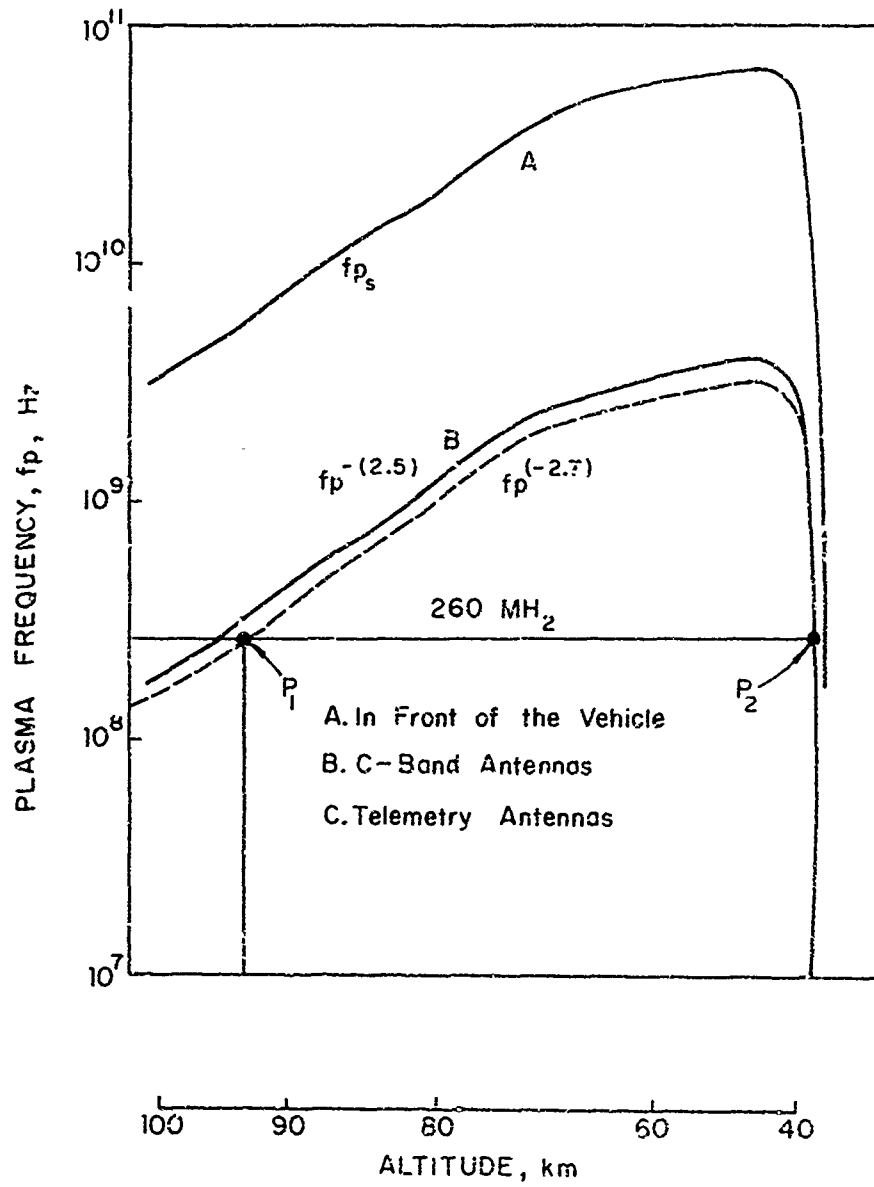
Figure II - 8. Maximum plasma frequency during MA - 6 reentry
(Lehnert and Rosenbaum 1965 , Figure 10).

C. <u>Communications Blackout Alleviation Techniques</u> A number
of techniques have been proposed to mitigate or eliminate the reentry
communications blackout problem. Some of the proposed techniques des-
cribed in this section are now in the advanced development stage, while
others have been found to have serious disadvantages which preclude
their use.

High frequency communications systems, operating at a frequency
greater than the expected peak plasma frequency, would substantially
reduce the reentry attenuation problem. This technique would require
the use of a communications frequency in excess of 10 GHz. The state
of the art has developed to the point where compact, lightweight RF
systems operating at 10 GHz and higher frequencies are available. The
cost of securing and installing such equipment at the numerous NASA and
military tracking stations throughout the world makes this technique
prohibitively expensive (Huber and Sims 1964). Alternatively, a high
frequency communications channel could be used to transmit signals to
a relay satellite. The satellite would then transmit the signals to
earth at the commonly used telemetry frequencies. This approach also
has not been used in practice due to the expense involved in launching
the required number of satellites (Jacavanco 1969).

Laser communications systems are suitable for transmitting
through the reentry plasma sheath but are not suitable for direct re-
entry vehicle to earth communications due to high atmospheric attenua-
tion of laser signals.

Aerodynamic shaping techniques have been adopted by the military
to make the plasma sheath about a ballistic missile reentry vehicle as
thin as possible (Jacavanco 1969). Sharply pointed reentry vehicles
are surrounded by a much thinner plasma sheath than that surrounding
blunted reentry vehicles. However, a sharply pointed reentry vehicle
has a reduced payload capability and increased aerodynamic heating pro-
blems compared to those of a blunted reentry vehicle (Huber and Sims
1964).

Magnetic fields, if properly produced near the antenna, can create a "magnetic window" in the reentry plasma through which electromagnetic waves can propagate. The magnetic field lines must be oriented such that the electrons are tightly bound to them through gyration and do not respond to the electric field component of the electromagnetic wave (Hodara 1961). The extra weight required for equipment to produce the magnetic fields makes the technique impractical, even with modern superconductor technology.

Electrophilic materials added to the plasma flow upstream from the antenna location appear to be the most promising technique for reducing the effect of the reentry plasma sheath. Molecules of electrophilic materials readily combine with free electrons to form negative ions, thus substantially lowering the plasma frequency. Early theoretical research (Rosen 1962) indicated that injecting micron size refractory dust particles into the plasma would efficiently lower the free electron density and hence reduce the plasma frequency. Laboratory studies (Carswell and Richard 1967) found sulfur hexafluoride, molecular oxygen, carbon dioxide and nitrous oxide to be efficient electrophilics. The injection of a gas into the reentry plasma flow stream to reduce the electron density is impractical, however, because no way has been found to make the gas penetrate the ionized layer much beyond the boundary layer. Similarly, solid particles are difficult to inject. In addition, solid particles rapidly reach a high temperature where thermionic emission affects their usefulness (Evans 1967).

The injection of liquid electrophilics into the reentry plasma seems to be the most practical solution because fine jets of liquid can easily penetrate the plasma moving at hypersonic speeds. The liquids are injected into the flow stream through nozzles with a throat diameter of approximately 3×10^{-5} meter located upstream from the antenna location. Water was the first liquid injectant to be thoroughly investigated and was found to be of value in reducing the electron density. Several common laboratory compounds, e.g. carbon tetrachloride, boron tribromide, acetone and Freon, have been found to be more effective

water in lowering the electron density of a supersonic laboratory
plasma (Jacavanco and Herskovitz 1970). Reentry flight tests in which
several of these liquid electrophilics were injected into the plasma
sheath to test their effectiveness were conducted during the RAM C-C
flight (Akey 1970) and are planned for a Trailblazer II flight (Rotman
1970). It is anticipated that the injection of these liquids into the
reentry plasma will be a reliable solution to the reentry communications
blackout problem.

The alleviation of the communications blackout problem requires
a thorough and accurate knowledge of the reentry plasma properties so
that the alleviation techniques may be employed in the most efficient
manner. The development of electromagnetic sensors to make accurate
measurements of the reentry plasma properties is, therefore, of great
significance to the problem of eliminating the communications blackout.

A description of various plasma diagnostic techniques which are
suitable for reentry applications is given in the following chapter.
Particular emphasis is given to showing why electromagnetic sensors are
ideally suited to reentry applications.

CHAPTER III

REENTRY PLASMA DIAGNOSTIC TECHNIQUES

A number of techniques have been, or are being, developed to
diagnose the properties of the reentry plasma sheath. Some of these
techniques are modified forms of those used to diagnose laboratory
plasmas, while other have been developed specifically for reentry
plasma diagnostics. The various reentry plasma diagnostic techniques
will be discussed briefly in this chapter so that the nature of the
reentry plasma diagnostic experiments described in the following chapter
is made clear.

A. Electrostatic Probes The electrostatic probe has been a
standard laboratory plasma diagnostic device for many years (Langmuir
and Mott-Smith 1924). Electrostatic probes also have been found useful
in determining the properties of reentry plasmas in certain cases
(Bredfeldt et al. 1965; Poirier et al. 1969; Scharfman 1969).

A probe may be any small conductor, such as a wire, which is
inserted into a plasma. A potential is applied to the probe with re-
spect to another conductor, at ground potential, in the plasma. This
second conductor may be one of the electrodes in a laboratory plasma
discharge or it may be the surface of the spacecraft under reentry
con'itions. The double floating probe of Johnson and Malter (1950)
uses a second probe wire as the reference electrode. Using Maxwell-
Boltzmann kinetic theory, the electron temperature and electron density
can be obtained from a plot of the pro' current measured as the probe
voltage is varied from about -50 volts to +50 volts.

Simple probe theory (Langmuir and Mott-Smith 1924; Langmuir
and Compton 1931; Darrow 1932; Loeb 1961) cannot be applied to measure-
ments made in a reentry plasma unless a number of modifications are
included to account for the fact that the flow is hypersonic and often
is not molecular as far as the probe is concerned. A more sophisticated

27

probe theory has been developed to account for these conditions. This
work has been reported by Scharfman (1965) and Scharfman et al. (1967).

Electrostatic probes have been used successfully to make plasma
diagnostic measurements during a portion of several reentry test
flights. These experiments are described in the following chapter.
Electrostatic probes generally are mounted on fins which protrude sym-
metrically from the reentry vehicle. The fins must be retracted at an
altitude of approximately 60 km. This is necessary because the severe
heating at lower altitudes probably would result in unequal burn-off
and cause spacecraft instability.

Electrostatic probes, while useful for measuring the spatial
variation of electron density and electron temperature during the
early stages or reentry, cannot be used at the lower altitudes where
the most severe plasma conditions occur unless the probes are flush-
mounted. Flush-mounted probes, however, can only determine the plasma
properties at the surface of the reentry vehicle. Consequently, elec-
trostatic probes are of limited usefulness in determining reentry
plasma properties.

B. Signal Attenuation Measurements A number of radio fre-
quency signal attenuation measurements have been made between reentry
vehicles and ground stations. However, these signal attenuation measure-
ments generally have been unsatisfactory as a means of obtaining quanti-
tative information about the reentry plasma sheath. The reasons are
simple and numerous. The signal level received on the ground is affected
by many factors in addition to the plasma sheath attenuation. The
vehicle attitude, antenna pattern distortion and antenna mismatch by
the plasma, signal attenuation by the atmosphere and tracking errors by
the ground based antenna all affect the received signal level. It is
seldom possible to account accurately for these factors. Consequently,
it is very difficult to determine the exact attenuation due to the
plasma sheath (Technical Report AFAL-TR-69-53). Nevertheless, useful
qualitative data concerning the reentry plasma sheath have been obtained.
Results of specific measurements are discussed in the following chapter.

C. <u>Radiometry</u>   Microwave radiometers have been used exten-
sively in laboratory applications to measure the thermally generated
noise emitted by plasmas. These noise measurements are then used to
determine the electron temperature of the plasma. Specific details
concerning radiometric measurements can be found in the book by Bekefi
(1966).

A laboratory study by Caron et al. (1969) was made to investigate
the usefulness of radiometer measurements in determining the properties
of a reentry plasma. It was concluded that a swept frequency radio-
meter could be useful in estimating the electron density and electron
collision frequency as well as the electron temperature of a reentry
plasma, although with limited accuracy.

The results of a fixed frequency radiometer experiment conducted
during a Trailblazer reentry test flight are discussed in the following
chapter.

D. <u>Antenna Impedance Measurements</u>   The electromagnetic
antenna is a device which is well suited for diagnosing plasmas. The
radiation pattern and impedance (or admittance) of an antenna, at a
given frequency, are dependent upon the physical dimensions of the
antenna and the dielectric coefficient of the surrounding medium .
While the radiation pattern of an antenna located on a hypersonic re-
entry vehicle is difficult to determine, the antenna impedance can be
measured with relative ease using a four-probe reflectometer (Osborne
1962; Bohley 1962; Bohley et al. 1963).

A number of reentry test flights have included experiments in
which the impedance of aperture antennas located on the surface of the
reentry vehicle has been measured to obtain information concerning the
properties of the reentry plasma sheath. These experiments are des-
cribed in the following chapter.

Problems generally have been encountered in relating the antenna
impedance measurements to the properties of the reentry plasma. The
causes of these problems are not difficult to determine. Usually, only
single frequency admittance measurements have been made at a given

location on the reentry vehicle. This restricts the amount of infor-
mation that can be obtained concerning the plasma sheath. Furthermore,
the characteristics of antennas in the reentry plasma environment often
have been analyzed using overly simplified and inaccurate mathematical
models.

E. Electroacoustic Probes   The electroacoustic probe (Lustig
and McBee 1969; Baird and Lustig 1970) operates on the principle that
an electromagnetic wave scattered from a bounded plasma undergoes a
series of amplitude resonances as the electron density or signal frequency
is varied. This effect was first observed by Tonks (1931) and has been
studied more recently by Dattner (1957).

The resonances arise from a standing wave pattern of electro-
acoustic waves which exists between the boundary of the plasma and the
point in the plasma where the plasma frequency is equal to the wave
frequency. The electroacoustic waves are longitudinal oscillations of
the electrons which propagate at the thermal velocity of the electrons
and, consequently, have a wavelength which is very much shorter than
the free space wavelength of electromagnetic waves of the same frequency.

The electroacoustic probe consists of the plane, open-end of a
coaxial line mounted flush with the surface of the reentry vehicle. The
probe is driven with an RF source (typically 400 to 1600 MHz) and the
reflected power is measured. A noticeable decrease in the reflected
power occurs when the distance between the probe surface and the point
in the plasma where $\omega = \omega_p$ is a multiple of one-half electroacoustic
wavelength. From a knowledge of the electron temperature, one can
determine the nature of the electron density distribution in the plasma
sheath boundary layer.

F. Other RF Techniques   Several other RF plasma diagnostic
devices have been proposed or are under development. Included are the
RF bridge (Fuhs et al. 1967), the RF impedance probe (Aisenburg and
Chang 1969; 1970), the resistive strip line probe (Rotman 1970), and the
slot isolation technique (Golden and Stewart 1970).

The RF bridge and RF impedance probe operate on the principle
that the reentry plasma can cause a change in the complex impedance of
an inductor located on the surface of a reentry vehicle. This change
in complex impedance can be measured and related to the electron density
and collision frequency of the plasma.

The resistive strip line probe is a section of a resistive
strip transmission line located on the surface of a reentry vehicle.
The reentry plasma sheath alters the complex impedance of the probe.
Measurements of the probe impedance made at microwave frequencies can
be related to the electron density and collision frequency of the
plasma (Rotman 1970).

The slot isolation technique is based upon the fact that the
power coupled between two slots on a ground plane covered by a thin,
overdense plasma layer is related to the integrated electron density
of the plasma sheath between the slots (Golden and Stewart 1969). The
instrumentation for measuring the electron density also can be used for
measurement of the signal attenuation produced by the plasma without
involving air-to-ground calibration uncertainties. This technique is
suitable for diagnostics of the thin plasma sheath on a sharp, slender,
conical reentry vehicle at low altitudes.

G. **Optical Techniques** Spectroscopic techniques involving
the measurement of spectral intensities and line broadening have been
used successfully in some instances to determine the density and temper-
ature of laboratory plasmas as well as the nature of trace impurities
in the plasmas. No attempt is made here to discuss the theory and
application of these techniques. The comprehensive review articles by
McWhirter (1965), Wiese (1965) and Turner (1965) and the book by Griem
(1964) perform that task admirably. The spectroscopic techniques
mentioned above are not suitable for diagnosing reentry plasmas because
of the nonequilibrium, chemically complicated and inhomogeneous nature
of these plasmas.

An investigation has been made (Flynn et al. 1966) to determine
if the radiation scattered from a laser beam incident upon a plasma

would provide a means of diagnosing the more dense reentry plasmas.
The light scattered from a plasma consists of a spectrum of wavelengths
which are distributed symmetrically around the incident wavelength.
The parameter α_0 characterizes the scattering and is given by

$$\alpha_0 = \lambda_0 (\frac{N_0}{2}) (\pi KT)^{\frac{1}{2}} \sin (\frac{\theta}{2}) \qquad \text{(III-1)}$$

where N_0 and T are the electron density and temperature of the
plasma, respectively; K is Boltzmann's constant, θ is the scatter
angle and λ_0 is the wavelength of the incident wave. A small value
of α_0 indicates that the scattering is due mainly to the electrons.
This results in a broad scattered spectrum which becomes nearly Gaussian
in shape as α_0 approaches zero. A large value of α_0 indicates that
the scattering is due mainly to the ions. The scattered spectrum then
is narrow and is shifted from the incident frequency by an amount equal
to the plasma frequency.

Successful scattering experiments were conducted by Flynn et al.
(1966) using a mercury lamp as a plasma source. In another experiment,
the mercury lamp was replaced by a shock tube generated plasma. This
experiment was less successful than was the first due to the large
amount of noise emitted in the red portion of the spectrum by the
plasma. This noise had not been emitted by the mercury lamp plasma.
It was hoped that the noise problem could be overcome by using plasmas
with high values of α_0 which would result in a scattered spectrum
having a high intensity over a narrow bandwidth. The bandwidth of the
spectrometer could then be decreased and the noise level reduced.
Decreasing the bandwidth of the spectrometer introduced a second problem,
however. A very small change in the plasma properties was sufficient
to shift the scattered radiation outside the pass band of the spectro-
meter.

It was concluded that scattering techniques with presently
available instrumentation also are not suitable for reentry plasma
diagnostics.

The reentry plasma diagnostic techniques described in this chapter have been used on a number of reentry test flights to obtain information about the reentry plasma sheath under a number of different flight conditions. These flight experiments and the results obtained are discussed in the following chapter.

CHAPTER IV

REENTRY FL_3HT EXPERIMENTS

Reentry flight experiments designed to gain information concerning the properties of the reentry plasma sheath have been conducted by the National Aeronautics and Space Administration (NASA) and the United States Air Force (USAF). The reentry flight programs are summarized in Table IV-1. Unfortunately, most of the quantitative results of these programs are classified and little information is available in the open literature. The objectives and results of these programs will be discussed as completely as is possible under the circumstances.

Project Fire was undertaken by NASA to determine the hot gas radiance and the total heat transfer rates on a fairly large blunt-nosed body reentering the earth's atmosphere at a peak velocity of 11 km per second, which is slightly higher than the velocities associated with the return of vehicles from the moon (Scallion and Lewis 1965 Lewis and Scallion 1966). Sufficient data were obtained from the two Fire flights to define accurately the reentry trajectory and to document the atmospher₁. environment.

In addition, data were obtained for the VHF and C-band communications blackout as well as for the VHF communications recovery. The theoretical blackout bounds were computed using an air chemistry analysis that included 11 chemical species and 46 chemical reactions. It was found that the then current chemical-kinetic concepts could be applied reasonably well during the VHF communications blackout period. The major uncertainty in these calculations apparently was in the boundary layer effects. In contrast, the C-band blackout points occurred at lower altitudes than indicated by the calculations. It was felt that the discrepancies probably were observed because the electron-ion recombination processes were not described in an adequate manner. These processes are negligible at the electron densities corresponding

34

TABLE IV-1

SUMMARY OF REENTRY SPACE FLIGHT PROGRAMS

PROJECT NAME	AGENCY	NUMBER OF FLIGHTS	PRINCIPAL OBJECTIVES
FIRE	NASA	2	measurement of hot gas radiance and total heat transfer rates
ASSET	USAF	6	study of aerodynamic, thermodynamic, structural and communications blackout aspects of a lifting reentry vehicle
RAM	NASA	8	study theoretically and experimentally the effects of the reentry plasma sheath upon reentry vehicle communications systems
MERCURY MA-6	NASA	1	part of the manned space flight program
GEMINI GT-3	NASA	1	part of the manned space flight program
TRAILBLAZER II	OSU	2	reentry plasma diagnostics
	USAF	4	reentry plasma diagnostics

TABLE IV-1 (Continued)

PROJECT NAME	REENTRY PLASMA EXPERIMENTS	COMMENTS	REPORTED BY
FIRE	radio signal attenuation measurements	air chemistry analyses used did not properly describe electron-ion recombination	Scallion and Lewis (1965); Lewis and Scallion (1966); Huber (1967a)
ASSET	radio signal attenuation and antenna impedance measurements	demonstrated usefulness of antenna impedance for reentry plasma diagnostics	Krause (1967); Plugge (1967)
RAM	aerodynamic shaping, magnetic windows, radio signal attenuation measurements, antenna impedance measurements, electrophilic addition, electrostatic probes	has resulted in a better understanding of ways to alleviate the communications blackout problem	Sims (1962); Sims and Jones (1963); Cuddihy et al (1963, 1967); Grantham (1964); Campbell (1966); Project Development Plan for Project RAM (1969); Akey (1970); Akey and Cross (1970); Grantham (1970); Jones and Cross (1970); Swift et al (1970)
MERCURY MA-6	radio signal attenuation measurements	demonstrated that ablation products significantly affect plasma	Huber (1967a)

TABLE IV-1   (Continued)

PROJECT NAME	REENTRY PLASMA EXPERIMENTS	COMMENTS	R PORTED BY
GEMINI GT-3	radic signal attenuation measurement, water addition	water addition reduced re-entry blackout	Huber (1967a); Schroeder and Russo (1968)
TRAILBLAZER II	antenna impedance measurements, radiometers, electrostatic probes, electroacoustic probes, antenna coupling measurements	substantial qualitative agreement obtained between theoretical predictions and experimental measurements	Caldecott et al. (1967); Caldecott and Bohley (1968); Mayhan et al. (1968); Caldecott et al. (1969); Poirier et al. (1969); Rotman (1970)

to the VHF blackout limits but are important at the electron densities corresponding to C-band blackout (Huber 1967b).

Project Asset was designed to investigate the basic aerodynamic, thermodynamic and structural aspects of a hypersonic, lifting reentry vehicle. A secondary objective of the Asset flights was an investigation of the effects of the reentry plasma sheath upon communications systems. Information concerning the plasma effects was obtained by measuring the impedance of a dielectric loaded, cavity-backed, U-slot VHF antenna on one flight and by measuring the impedance of an X-band open-ended waveguide antenna on another flight. Signal attenuation measurements were made at VHF, C-band and X-band frequencies during all of the three successful Asset flights. A qualitative summary of the flight objectives and results of this USAF project undertaken in conjunction with the Ohio State University and the McDonnell Aircraft Corporation is given by Plugge (1967) and by Krause (1967).

The measured values of antenna impedance indicate that such measurements are sensitive to the reentry plasma conditions. No quantitative results were obtained from these measurements because the shape of the vehicle and the VHF antenna configuration were not amenable to accurate theoretical analysis and because several unexplained equipment malfunctions resulted in anomalous data.

It is believed, however, that during a portion of the flight, a dense layer of plasma was displaced somewhat from the surface of the VHF antenna and formed a trough waveguide. This trough waveguide resulted in the ducting of power from the antenna towards the back and top of the vehicle. This phenomenon is analyzed in detail by Dybdal (1966).

Despite the lack of quantitative results from the impedance measurements, it was concluded that such measurements could be of value in the study of the reentry plasma sheath. Care must be taken, however, to design experiments which are susceptable to theoretical analysis.

Project Ram is an extensive research program being conducted
at the NASA Langley Research Center to study, both theoretically and
experimentally, the effects of the reentry plasma sheath upon reentry
vehicle communications systems. Methods of minimizing the communica-
tions blackout also are being explored. This program is called Project
RAM (Radio Attenuation Measurements) and has consisted of eight rocket
flights (seven successful) from 1961 to date. Four of the successful
flights reentered at 5.5 km per second while the last three flights re-
entered at 7.5 km per second (Project Development Plan for Project
RAM C 1969; Akey 1970).

The geometry of all RAM reentry vehicles has been a simple
hemisphere-cone because this shape is amenable to theoretical analysis.
It is expected that the theoretical and experimental results obtained
using the RAM geometry can be extrapolated to provide estimates of
the communications blackout problem and recommendations for blackout
alleviation techniques for more complex spacecraft geometries.

The missions of the RAM A-1 and RAM A-2 vehicles were to
determine the effectiveness of aerodynamic shaping and magnetic win-
dows in reducing the communications blackout problem. Signal attenua-
tion and antenna impedance measurements were made to determine the
effectiveness of these techniques (Project Development Plan for Project
RAM C 1969).

The mission objectives of RAM A-1 and A-2 were achieved. The
results of these flights, however, are discussed in several classified
reports (Sims 1962; Sims and Jones 1963) and are not available in the
open literature.

The RAM B-1 vehicle was designed to carry a series of multi-
frequency radio attenuation experiments. The mission objectives were
not achieved due to a rocket malfunctions (Project Development Plan for
Project RAM C 1969).

The effectiveness of water addition to the reentry plasma flow
stream in reducing the communcations blackout problem was the main
mission objective of the RAM B-2 flight. The effectiveness of the

water addition was determined through radio attenuation measurements. It is known that the water addition did alleviate the communications blackout problem to a degree (Project Development Plan for Project RAM C 1969). The quantitative data from the experiment, however, appears only in the classified literature (Cuddihy et al. 1963; 1967).

The principal mission objective of the RAM B-3 flight was the measurement of X-band, S-band and VHF antenna impedances during reentry. The purpose of these experiments was to determine the usefulness of antenna impedance measurements in determining the properties of the reentry plasma sheath.

Two S-band aperture antennas and two X-band aperture antennas were located in the nose region of the reentry vehicle. A VHF slot antenna was located further aft. The results of the S-band and X-band antenna impedance measurements are discussed qualitatively by Huber (1967b).

The X-band and S-band antenna impedance measurements confirmed the prediction that the reaction

$$N + O \longleftrightarrow NO^+ + e^-$$

is the dominant ionizing reaction at altitudes of about 50 to 40 km, and velocities of about 6 km per second. Furthermore, a value of the rate coefficient for this reaction in the temperature range $3000 < T < 7500°K$ was determined to within a factor of two as a result of the antenna impedance measurements.

It had been predicted that in the low altitude, low velocity portion of the flight the reentry plasma electron density, and hence the antenna impedance, would be sensitive to the rate coefficient for this reaction

$$O_2 + M \longleftrightarrow O + O + M$$

and would be relatively insensitive to other reaction rates at the nose region of the reentry vehicle where the S-band and X-band antennas were

located. Comparison of the measured values of antenna impedance with calculations resulted in the evaluation of the rate coefficient for the dissociation of oxygen in the temperature range $4000 < T < 6000^{\circ}K$.

The effects of the aerodynamic boundary layer are significant at altitudes above about 60 km but become insignificant below this level. Discrepancies occurred between the measured values of antenna impedance made at high altitudes and the calculated values. Accurate estimates of the true boundary layer thickness were made from the antenna impedance measurements.

The impedance of the cavity-backed VHF slot antenna was measured, primarily, to observe the detuning effects produced by the plasma sheath. However, the impedance measurements were found to indicate accurately the time in the flight when the excitation frequency of the antenna was equal to the plasma frequency. No other information could be obtained from the impedance measurements because the antenna configuration was not amenable to an accurate theoretical analysis (Campbell 1966).

A quantitative discussion of the RAM B-3 experiments is given in the classified reports by Grantham (1964) and by Evans and Schexnayder (1967).

The peak reentry velocity of the RAM C-I flight was 7.5 km per second compared to a peak velocity of 5.4 km per second for the earlier flights. The prime RAM C-I experiments consisted of an experiment in which water was added to the plasma flow stream to study its effectiveness in reducing the communications blackout problem and a series of electrostatic probe experiments to determine the ion density distribution in the flow field. Microwave signal attenuation and antenna impedance measurements were also made to measure the effectiveness of the water addition. It was found that the addition of water to the plasma flow stream did not reduce the reentry communications blackout problem to the degree that had been expected (Akey and Cross 1970).

The RAM C-II vehicle was instrumented with a series of electrostatic probes to determine the ion density distribution in the flow

field as was the RAM C-I vehicle (Jones and Cross 1970). In addition, the RAM C-II was equipped with several experiments in which the impedance of microwave antennas was measured to determine the plasma layer electron density and standoff distance (Grantham 1970).

The electrostatic probes used on both the RAM C-I and RAM C-II flights were mounted on an aerodynamic fin to measure the ion densities in the flow field out to a distance of .07 meters from the reentry vehicle. A second aerodynamic fin, without the electrostatic probes, was employed to provide aerodynamic symmetry and stability. The probe fins were retracted at an altitude of approximatley 55 km because the severe heating which occurs at lower altitudes probably would result in unequal burn-off of the fins which would affect the stability of the spacecraft. Preflight calculations had indicated that the probes would extend well past the region of peak ion density. The probe data from both flights, however, indicate that the ionization density was still increasing at .07 meters (Project Development Plan for Project RAM C 1969; Jones and Cross 1970).

Quantitative results from the RAM C-I reentry flight experiments are presented in the unclassified reports by Akey and Cross (1970). Results of the RAM C-II experiments are discussed by Grantham (to be published) and Jones and Cross (to be published).

The final vehicle in the RAM series, RAM C-C, was flown in the Fall of 1970. This vehicle attained a peak reentry velocity of 7.5 km per second, as did the other two RAM C vehicles. Three principal experiments were conducted during the flight of the RAM C-C (Project Development Plan for Project RAM C 1969).

Water was injected into the reentry plasma during the flights of both RAM B-2 and RAM C-I to reduce the communications blackout problem. One RAM C-C experiment consisted of alternate injections of perfluoro-octane and water to compare their relative effectiveness in blackout alleviation. Nozzles were symmetrically located on the surface of the vehicle to assure uniform material injection. The in-

jection system was pressurized with nitrogen gas and was operated at various flow rates. Results of the RAM C-C experiments have not yet been published.

Electrostatic probe measurements, similar to those made during the flights of RAM C-I and RAM C-II, also were made during the early part of the RAM C-C reentry flight. As mentioned beforehand, the previous electrostatic probe measurements were made out to a distance of .07 meters from the surface of the reentry vehicle but did not locate the point of maximum ionization. The probes on Ram C-C made measurements in the flow field to a distance of .14 meters from the vehicle surface. Measurements to this distance should be sufficient to determine the region of peak ionization.

The impedance of a single S-band diagnostic antenna was continuously monitored to determine the properties of the ionized flow. The impedance measurements should be useful over a range of two decades of electron concentration and should provide qualitative information about the shape of the reentry plasma electron density profile (Swift et al. 1970).

Project RAM has resulted in a considerably better understanding of the reentry plasma sheath. It also has resulted in the development of communications blackout alleviation techniques. Furthermore, it has demonstrated that antenna impedance measurements are useful in determining the properties of the reentry plasma. At the present time, however, antenna impedance measurements primarily provide qualitative information.

Project Mercury and Project Gemini ground-based tracking and communications stations recorded a considerable amount of received signal-strength data during the course of these manned-spacecraft programs. The data, in some cases, have been related to the spacecraft reentry flight parameters to allow a qualitative analysis of the reentry plasma. The qualitative analysis of data obtained during the flights of the MA-6 (Mercury) and GT-3 (Gemini) spacecraft is reported by Huber (1967a).

It is possible to calculate a peak shock-layer value of plasma electron density for each signal attenuation data point, provided that the corresponding electron collision frequency is known and that an accurate model of the electromagnetic wave propagation is employed which is amenable to analysis. Calculations have shown that the computed electron density is not very sensitive to the collision frequency and plasma thickness for the low collision frequencies and thick plasma layers encountered by the MA-6 and GT-3. A drawing of the plasma flow regions about the GT-3 is shown in Figure IV-1.

Theoretical electron density calculations based upon chemical-kinetic and flow streamline techniques in pure air were made but the results show no correlation with the signal attenuation measurements at altitudes below about 60 km. The theoretical models predict a value of electron density which is low by almost a factor of ten. It seems reasonable to conclude, therefore. that a pure air plasma is not responsible for the observed reentry signal attenuation, at least at the lower altitudes.

It was necessary, therefore, to consider the possible influence of the ablation products from the heat shield. Ablation occurs throughout the portion of the reentry period in question and the heat shield materials are known to contain easily ionized constituents. Unfortunately, the presence of ablation products from the heat shield results in an extremely complex and poorly understood fluid-mechanics and chemical-kinetic problem.

Best estimates indicate, however, that the loss of radio signals during the reentry of these manned vehicles can be attributed, in large part, to the effects of the heat shieled ablation products in the near-wake viscous flow regions. The relatively high electron density which exists in the separated flow region is due to the high enthalpy and long flow-dwell-time in this region which produce considerable ionization of heat shield ablation products.

An experiment involving the injection of water spray into the separated flow region was performed during the flight of GT-3. The
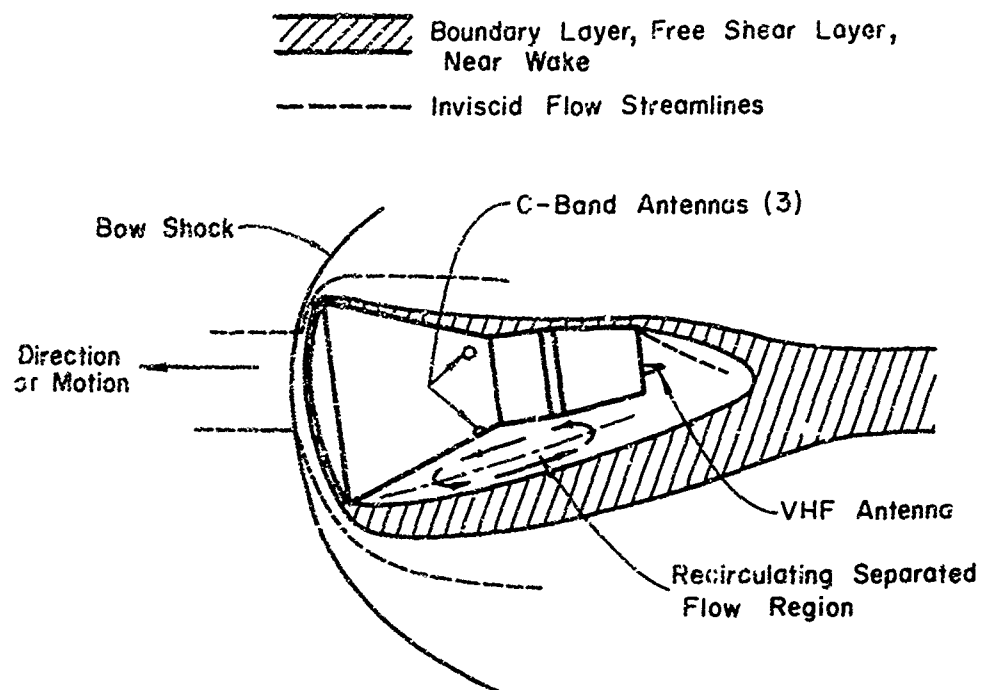
Figure IV-1. Reentry plasma flow regions about the GT-3
spacecraft (Huber 1967a, Figure 1).

injection of the water spray resulted in large decreases in the temperature and electron density in the separated flow region and created a window for radio frequency transmission at the antenna location. The quantitative results of this experiment are presented in the classified report by Schroeder and Russo (1968).

Project Trailblazer II is a USAF reentry test flight program, part of which has been carried out in conjunction with the Ohio State University (OSU). The principal experiment aboard tne first OSU-USAF flight involved a pair of RF reflectometers operating in C-band and S-band, respectively. These reflectometers were used to measure the impedance of two dielectric-filled, flush-mounted, open-ended waveguide antennas operating at different frequencies (Caldecott et al 1967). The second and final OSU-USAF flight carried an S-band radiometer experiment to measure the RF noise generated by the plasma (Caldecott and Bohley 1968; Caldecott et al. 1969).

The two open-ended-waveguide antennas used in the experiments of the first flight were located near the nose of the reentry vehicle and were operated at frequencies of 2.85 and 5.6 GHz, respectively. The four-probe reflectometers used in making the impedance measurements have been described by Bohley (1962).

The purpose of the antenna impedance measurements was to see if such measurements are useful in diagnosing a reentry plasma. However, no attempt was made to diagnose the plasma directly from the impedance measurements. Rather, calculations based on aerodynamics and chemical kinetics were made to determine the expected plasma profiles at the antenna locations. Calculations of the impedances of the antennas were then made using these plasma profiles together with the impedance formulation of Mayhan (1967). The calculated values of impedance showed reasonable agreement with the measured values, indicating the validity of the aerodynamic and chemical-kinetic equations (Mayhan et al. 1968a).

The S-band radiometer carried aboard the second OSU-USAF Trailblazer II flight was designed to measure the plasma generated noise at 2.2 GHz from three antennas located near the nose of the vehicle and

connected to the radiometer in sequence. The measured value of effective plasma noise temperature during reentry was about 4000° K at antenna locations where the plasma was not contaminated by the ablated heat shield material. Aerodynamic and chemical-kinetic calculations (Mayhan 1968b) predicted an effective plasma noise temperature which differed only slightly from the measured value.

The predicted effective plasma noise temperature at one antenna location was much lower than the measured value. It was assumed that the higher measured noise temperature at that location was due to the presence of ablation materials in the plasma flow stream which was not accounted for in the calculations.

Several additional Trailblazer II rocket flights have been conducted independently by the USAF. The experiments conducted during the first of these flights resulted in measurement of the plasma sheath effect upon the radiation pattern, signal attenuation and impedance mismatch for an S-band slot antenna located at the stagnation point of the nose cone. The plasma sheath effect upon the coupling between two S-band antennas located on the nose cone also was measured. In addition, flush-mounted electrostatic and electroacoustic probes were used to determine the electron density profile and gradients in the nose cone region (Poirier et al. 1969; Rotman 1970).

Substantial qualitative agreement exists between theoretical predictions and experimental measurements in all cases. One of the more interesting experimental findings was that the plasma sheath did not substantially change the radiation pattern shape of the S-band slot antenna located at the nose of the reentry vehicle even though the sheath attenuated the signal level by over 20 decibels. This behavior had been predicted by Fante (1967) who found that overdense plasma sheaths which are thin compared to the wavelength of the transmitted signal are equivalent to impedance sheets which attenuate the signal level without changing the radiation pattern shape.

Additional Trailblazer II flights are planned by the USAF to make further plasma diagnostic measurements and to measure the effectiveness of liquid injectants in reducing the reentry communications blackout problem (Rotman 1970).

CHAPTER V

CONCLUSIONS

It is anticipated that the injection of electrophilic liquids into the reentry plasma flow stream, coupled with aerodynamic shaping techniques, will be a reliable solution to the reentry communications blackout problem. However, the alleviation of the communications blackout problem requires a thorough and accurate knowledge of the reentry plasma properties so that the alleviation techniques may be employed in the most efficient manner.

In general, the results obtained from the plasma diagnostic experiments, while very useful, have been less than completely satisfactory. Some of the diagnostic devices, such as the fin-mounted electrostatic probes, can operate only during a very limited portion of the reentry flight due to the severe environmental conditions encountered. The operation of the electroacoustic probe depends upon the existence of a physical resonance condition in the plasma. Electroacoustic probes provide useful information only when this resonance condition occurs. Fixed frequency radiometer measurements provide only information concerning the temperature of the plasma. Other diagnostic techniques, such as those involving signal attenuation measurements, are unreliable because of the large number of uncertainties associated with the experiments.

The use of microwave antenna impedance measurements in determining the properties of reentry plasma sheaths heretofore has not yielded completely satisfactory quantitative results either. This is primarily because of the lack of an adequate theory describing the performance of antennas in plasmas and the fact that the antenna impedance generally has been measured only at a single frequency. However, the development of an accurate theory relating the antenna impedance measurements to the plasma properties and the development of flight-worthy swept-frequency or multiple-frequency instrumentation should make it possible

48

to determine quantitatively and accurately the electron density, electron collision frequency and electron temperature of the reentry plasma sheath from antenna impedance measurements. Furthermore, it should be possible to make these measurements over the range of plasma values which occurs during the most important periods of the reentry flight.

The development of electromagnetic sensors to make accurate measurements of the reentry plasma properties is, therefore, of great significance to the problem of eliminating the reentry communications blackout.

REFERENCES

Aisenburg, S. and K. W. Chang (1969), "An RF Coil System for the
    Measurement of Plasma Electrical Conductivity," Scientific
    Report No. 1, Contract No. F19628-68-C-0127, Space Sciences
    Incorporated. Waltham, Massachusetts.

Aisenburg, S. and K. W. Chang (1970), "A Nonprotruding Conductivity
    Probe System for Reentry Plasma Diagnostics," presented at the
    Symposium on the Entry Plasma Sheath and Its Effects on Space
    Vehicle Electromagnetic Systems (4th Plasma Sheath Symposium)
    October 13-15, 1970, NASA Langely Research Center, Hampton,
    Virginia.

Akey, N. D. (1970), "Overview of RAM Reentry Measurements Program,"
    presented at the Symposium on the Entry Plasma Sheath and Its
    Effects on Space Vehicle Electromagnetic Systems (4th Plasma
    Sheath Symposium) October 13-15, 1970, NASA Langley Research
    Center, Hampton, Virginia.

Akey, N. D. and A. E. Cross (1970), "Radio Blackout Alleviation and
    Plasma Diagnostic Results from a 25,000 Foot per Second Blunt-
    Body Reentry," NASA TN D-5615, Langley Research Center.

Baird, A. W. and C. D. Lustig (1970), "The Use of Electroacoustic
    Resonances to Determine Electron Density Profiles," presented
    at the Symposium on the Entry Plasma Sheath and Its Effects
    on Space Vehicle Electromagnetic Systems (4th Plasma Sheath
    Symposium) October 13-15, 1970, NASA Langley Research Center,
    Hampton, Virginia.

Bekefi, G. (1966), Radiation Processes in Plasmas, John Wiley and Sons,
    New York.

Bohley, P. (1962), "A Reflectometer Experiment at S-Band for Re-Entry
    Vehicles," Report 1021-15, Antenna Laboratory, The Ohio State
    University Research Foundation.

Bohley, P., R. Caldecott, R. McGown and R. C. Taylor (1963), "Automatic
    Impedance Plotter for Missile Application," Report 1565-1, Antenna
    Laboratory, The Ohio State University Research Foundation.

Bredfeldt, H. R., W. E. Scharfman, H. Guthart and T. Morita (1965),
    "The Use of Ion-Probes in Reentry Physics," Stanford Research
    Institute Technical Report No. 26.

Caldecott, R., P. Bohley and R. M. Nerem (1967), "Reentry Communications: Antenna Impedance and Radar Reflections Recorded During the Reentry of a Trailblazer Rocket Vehicle on 14 February 1966," Report 2146-7, ElectroScience Laboratory, The Ohio State University Research Foundation.

Caldecott, R. and P. Bohley (1968), "Radio Frequency Noise During Reentry Measurements Made at 2235 Mc/s During the Reentry of a Trailblazer Rocket Vehicle," Report 2151-7, ElectroScience Laboratory, The Ohio State University Research Foundation.

Caldecott, R., P. Bohley and J. W. Mayhan (1969), "Radio Frequency Noise During Reentry," IEEE Transactions on Antennas and Propagation, AP-17, 786.

Campbell, T. G. (1966), "Impedance of Plasma Coated Axial Slot Antenna," NASA TM X-59087, Langley Research Center.

Caron, P. R., G. Haroules, W. Brown III and F. Russo (1969), "A Laboratory Study of Microwave Radiometric Techniques for Re-Entry Plasma Measurements," NASA TN D-5274, Electronics Research Center.

Carswell, A. I. and C. Richard (1967), "Plasma Sheath Reduction by Electron Attachment Processes," Proceedings of the Third Symposium on the Plasma Sheath-Plasma Electromagnetics of Hypersonic Flight, Vol. II, Report No. AFCRL-67-0280, U. S. Air Force Cambridge Research Laboratories, 281.

Chown, J. B., W. C. Taylor, E. F. Vance, J. E. Nanevicz and T. Morita (1967), "Effects of Re-Entry and Space Environments on Antenna Breakdown," Proceedings of the Third Symposium on the Plasma Sheath-Plasma Electromagnetics of Hypersonic Flight, Vol. II, Report No. AFCRL-67-0280, U. S. Air Force Cambridge Research Laboratories, 271.

Cuddihy, W. F., I. E. Beckwith and L. C. Schroeder (1962), "RAM B-2 Flight Test of a Method for Reducing Radio Attenuation During Hypersonic Reentry," NASA TM X-902, Langley Research Center. CONFIDENTIAL.

Cuddihy, W. F., I. E. Beckwith and L. C. Schroeder (1967), "Flight Test and Analysis of a Method for Reducing Radio Attenuation During Hypersonic Flight," NASA TM X-1331, Langley Research Center. CONFIDENTIAL.

Darrow K. K. (1932), Electrical Phenomena in Gases, William Wilkins, Baltimore.

Dattner, L. (1957), "The Plasma Resonator," Ericsson Technics, 13, 309.

Dunn, M. G. (1970), "Comparison Between Predicted and Measured Blackout Boundaries for Earth Entry of Apollo," presented at the Symposium on the Entry Plasma Sheath and Its Effects on Space Vehicle Electromagnetic Systems (4th Plasma Sheath Symposium), October 13-15, 1970, NASA Langley Research Center, Hampton, Virginia.

Dunn, J. W., J. W. Dabier, J. A. Lordi and R. E. Mates (1967), "Estimates of Non-Equilibrium Ionization Phenomena in The Inviscid Apollo Plasma Sheath," The Proceedings of the Third Symposium on the Plasma Sheath-Plasma Electromagnetics of Hypersonic Flight, Vol. II, Report No. AFCRL-67-0280, U.S. Air Force Cambridge Research Laboratories, 35.

Dybdal, R. B. (1966), "Trough Waveguide Analysis of Glide Re-Entry Vehicle," Report 2146-2, Antenna Laboratory, The Ohio State University Research Foundation.

Epstein, M. (1967), "Antenna Breakdown in a Hypersonic Re-Entry Environment," Proceedings of the Third Symposium in the Plasma Sheath-Plasma Electromagnetics of Hypersonic Flight, Vol. II, Report No. AFCRL-67-0280, U.S. Air Force Cambridge Research Laboratories, 169.

Evans, J. S. (1967), "Reduction of Free Electron Concentration in a Reentry Plasma by Injection of Liquids," Proceedings of the Third Symposium on Plasma Sheath-Plasma Electromagnetics of Hypersonic Flight, Vol. II, Report No. AFCRL-67-0280, U.S. Air Force Cambridge Research Laboratories, 343.

Evans, J. S. and C. J. Schexnayder (1967), "Analysis of Theoretical and Experimental Electron Concentrations for RAM B-3 Flight," NASA TM X-1412, Langley Research Center. CONFIDENTIAL.

Fante, R. L. (1967), "Effect of Thin Plasmas on an Aperture Antenna in an Infinite Ground Plane," Radio Science, 2 (New Series), 87.

Flynn, J. T., and R. V. DeVore and R. Caldecott (1966), "A Study of Shock Tube Plasma Diagnosis by Scattering of Light," Report 2146-2, ElectroScience Laboratory, The Ohio State University Research Foundation.

Friel, P. J. and B. Rosenbaum (1964), "Propagation of Electromagnetic Waves Through Reentry-Induced Plasmas," Advances in the Astronautical Sciences, 11, American Astronautical Society, 399.

Fuhs, A. E., W. R. Grabowsky and O. L. Gibbs (1967), "Use of Radio Frequency Bridge for Re-Entry Plasma Diagnostics," Journal of Spacecraft, 4, 327.

Golden, K. E. and G. E. Stewart (1969), "Self- and Mutual Admittances of Rectangular-Slot Antennas in the Presence of a Inhomogeneous Plasma Layer," IEEE Transactions on Antennas and Propagation, AP-17, 763.

Golden, K. E. and G. E. Stewart (1970), "Integrated Electron Density Measurements from Reentry Sheath Induced Changes in Slot Isolation," Proceedings of the IEEE, 58, 165.

Grantham, W. L. (1964), "Preliminary Analysis of Plasma Sheath Electron Density Measurements at Entry Velocities " NASA TM X-1035, Langley Research Center. CONFIDENTIAL.

Grantham W. L. (1970), "Reentry Plasma Measurements Using a Four Frequency Reflectometer," presented at the Symposium on the Entry Plasma Sheath and Its Effects on Space Vehicle Electromagnetic Systems (4th Plasma Sheath Symposium), October 13-15, 1970, NASA Langley Research Center, Hampton, Virginia.

Grantham, W. L. (to be published), "Flight Results of a 25,000 ft./sec. Reentry Experiment Using Microwave Reflectometers to Measure Plasma Electron Density and Standoff Distance," NASA TN under preparation, Langley Research Center.

Heald, M. A. and C. B. Wharton (1965), Plasma Diagnostics with Microwaves, John Wiley and Sons, Inc., New York.

Hodara, H. (1961), "The Use of Magnetic Fields in the Elimination of the Re-Entry Radio Blackout," Proceedings of the IRE, 49, 1825.

Huber, P. W. (1967a), "Deduction of Reentry Plasma Properties About Manned Orbital Spacecraft from Radio Signal Attenuation Data," NASA TN D-4118, Langley Research Center.

Huber, P. W. (1967b), "Relation Between Reentry Plasma Knowledge and Flight Data," NASA TM X 60771, Langley Research Center.

Huber, P. W. and T. E. Sims (1964), "The Entry-Communications Problem," Astronautics and Aeronautics, 2, 30.

Jacavanco, D. J. (1969), "Electron Reduction in the Reentry Plasma Sheath," AFCRL-69-0154, U. S. Air Force Cambridge Research Laboratories.

Jacavanco, D. J. and S. B. Herskovitz (1970), "Determination of Electron Quenchant Efficiencies Under Simulated Entry Conditions," presented at the Symposium on the Entry Plasma Sheath and Its Effects on Space Vehicle Electromagnetic Systems (4th Plasma Sheath Symposium), October 13-15, 1970, NASA Langley Research Center, Hampton, Virginia.

Jackman, D. A., C. R. Mullin and R. H. Levy (1964), "The Re-Entry
    Plasma Sheath," Space/Aeronautics, 41, 53.

Joerger, C. D. and Glatt, M. A. (1967), "Analysis of Plasma Generators
    for Testing Reentry Communications Systems," Proceedings of
    the Third Symposium on the Plasma Sheath-Plasma Electromagnetics
    of Hypersonic Flight, Vol. III, Report No. AFCRL-67-0280,
    U. S. Air Force Cambridge Research Laboratories, 1.

Johnson, E. O. and L. Malter (1950), "A Floating Double Probe Method
    for Measurement in Gas Discharges," Physical Review, 80, 58.

Jones, W. L. and A. E. Cross (1970), "Electrostatic Probe Measurements
    of Plasma Surrounding Three 25,000 ft./sec. Reentry Flight
    Experiments," presented at the Symposium on the Entry Plasma Sheath
    and Its Effects on Space Vehicle Electromagnetic Systems (4th
    Plasma Sheath Symposium), October 13-15, 1970, NASA Langley Research
    Center, Hampton, Virginia.

Jones, W. L., Jr., and A. E. Cross (to be published), Electrostatic
    Probe Measurements of Plasma Parameters During Two 25,000 ft./sec
    Reentry Flight Experiments," NASA TN D under preparation.

Krause, P. M. (1967), "The Effect of Glide Re-Entry Shock Induced
    Ionization on the Communication System of the Asset Vehicle,"
    Proceedings of the Third Symposium on the Plasma Sheath-Plasma
    Electromagnetics of Hypersonic Flight, Vol. III, Report No.
    AFCRL-67-0280, U. S. Air Force Cambridge Research Laboratories,
    95.

Langmuir, I. and K. T. Compton (1931), "Electrical Discharges," Review
    of Modern Physics, 3, 191.

Lnagmuir, I. and H. Mott-Smith (1924), "Studies of Electric Discharges
    at Low Pressures," General Electric Review, 27, 449.

Lehnert, R. and B. Rosenbaum (1965), "Plasma Effect on Apollo Reentry
    Communications," NASA TN D-2732, Goddard Space Flight Center

Lewis, J. H., Jr., and W. I. Scallion (1966), "Flight Parameters and
    Vehicle Performance for Project Fire Flight II, Launched
    May 22, 1965," NASA TN D-3569, Langley Research Center.

Loeb, L. B. (1961), Basic Processes of Gaseous Electronics, University
    of California Press, Berkeley.

Lustig, C. D. and W. B. McBee (1969), "Proposed Method of Measurement
    of Electron Density in Re-Entry Sheaths by Observation of
    Electroacoustic Resonances," Report No. SRRC-CR-68-50, Sperry
    Rand Research Center.

Mayhan, J. W. (1967), "Properties of Planar Antennas Radiating Into Linear Inhomogeneous Media with Application to Plasma Diagnostics," Report 2146-8, ElectroScience Laboratory, The Ohio State University Research Foundation.

Mayhan, J. W. (1968a), "Calculation of the Effective Noise Temperature of Planar Antennas Radiating Into Linear Inhomogeneous Plasma Media," Report 2146-10, ElectroScience Laboratory, The Ohio State University Research Foundation.

Mayhan, J. S. (1968b), "Plasma Diagnostics Using the Reflection Coefficient of Planar Antennas," Report 2146-11, ElectroScience Laboratory, The Ohio State University Research Foundation.

Mayhan, J. W., R. Caldecott and P. Bohley (1968), "Antenna Impedance in a Reentry Environment," IEEE Transactions on Antennas and Propagation, AP-16, 573.

McCabe, W. M. and C. F. Stolwyk (1962), "Electromagnetic Propagation through Shock-Ionized Air Surrounding Glide Re-Entry Spacecraft," IRE Transactions on Space Electronics and Telemetry, SET-8, 257.

McWhirter, R. W. P. (1965), "Spectral Intensities," Plasma Diagnostic Techniques, edited by R. H. Huddlestone and S. L. Leonard, Academic Press, New York.

Montgomery, D. C. and D. A. Tidman (1964), Plasma Kinetic Theory, McGraw-Hill Book Company, New York.

Osborne, F. J. F. (1962), "A Multiple-Probe Microwave System for Plasma Studies," Canadian Journal of Physics, 40, 1620.

Plonsey, R. and R. E. Collin (1961), Principles and Applications of Electromagnetic Fields, McGraw-Hill Book Company, Inc., New York.

Plugge, R. J. (1967), "Reflectometer Measurement of the Plasma Sheath Encountered During the Project Asset Flights," Proceedings of the Third Symposium on the Plasma Sheath-Plasma Electromagnetics of Hypersonic Flight, Vol. III, Report No. AFCRL-67-0280, U. S. Air Force Cambridge Research Laboratories, 259.

Poirier, J. L., W. Rotman, D. Hayes and J. Lennon (1969), "Effects of the Reentry Plasma Sheath on Microwave Antenna Performance: Trailblazer II Rocket Results of 18 June 1967," Report No. AFCRL-69-0354, U. S. Air Force Cambridge Research Laboratories.

Project Development Plan for Project RAM C, May 15, 1969, NASA Langley Research Center.

Rosen, G. (1962), "Method for the Removal of Free Electrons in a
    Plasma," Physics of Fluids, 5, 737.

Rotman, W. (1970), "Studies of Reentry Plasma Sheath Effects Upon
    Antenna Performance," presented at the Symposium on the Entry Plasma
    Sheath and Its Effects on Space Vehicle Electromagnetic Systems
    (4th Plasma Sheath Symposium), October 13-15, 1970, NASA Langley
    Research Center, Hampton, Virginia.

Scallion, W. I. and J. H. Lewis, Jr.,(1965), "Flight Parameters and
    Vehicle Performance for Project Fire Flight I, Launched
    April 14, 1964," NASA TN D-2996, Langley Research Center.

Scharfman, W. E. (1965), "The Use of Langmuir Probes to Determine the
    Electron Density Surrounding Re-Entry Vehicles," Stanford
    Research Institute, Contract No. NAS1-3942.

Scharfman, W. E. (1969), "Operation of Electrostatic Flush Probes in
    Thin Plasma Layers," Stanford Research Institute, Contract
    No. 60192 under DAHC60-69-C-0008.

Scharfman, W. E., H. Bredfeldt, H. Guthart and T. Morita (1967), "The
    Use of Langmuir Probes in Diagnosing Ionized Flow Fields,"
    Proceedings of the Third Symposium on the Plasma Sheath-Plasma
    Electromagnetics of Hypersonic Flight, Vol. II, Report No.
    AFCRL-67-0280, U. S. Air Force Cambridge Research Laboratories,
    125.

Schroeder, L. C. and F. P. Russo (1968), "Flight Investigation and
    Analysis of Alleviation of Communications Blackout by Water
    Injection During Gemini 3 Reentry," NASA TM X-1521, Langley
    Research Center. CONFIDENTIAL.

Sims, T. E. (1962), "Measurement of VHF Signal Attenuation and Antenna
    Impedance for the RAM A-1 Slender Probe at Velocities up to
    17,800 ft./sec.," presented at the Second Symposium on the
    Plasma Sheath, Boston, Massachusetts, April 10-12, 1962.
    CONFIDENTIAL.

Sims, T. E. and R. F. Jones (1963), "Flight Measurements of VHF Signal
    Attenuation and Antenna Impedance for the RAM A-1 Slender Probe
    at Velocities up to 17,800 feet Per Second," NASA TM X-760
    Langley Research Center. CONFIDENTIAL.

Sommerfield, A. (1952), Physics of Fully Ionized Gases, Interscience
    Publishers, Inc., New York.

Stratton, J. R. (1941), Electromagnetic Theory, Mc-Graw-Hill Book
    Company, New York.

Swift, C. T., F. B. Beck and J. Thomson (1970), "The RAM C-C S-Band Diagnostic Experiment," presented at the Symposium on the Entry Plasma Sheath and Its Effects on Space Vehicle Electromagnetic Systems (4th Plasma Sheath Symposium), October 13-15, 1970, NASA Langley Research Center, Hampton, Virginia.

Tanenbaum, B. S. (1967), Plasma Physics, McGraw-Hill Book Company, Inc., New York.

Technical Report AFAL-TR-69-53 (1969), "Ion Sheath Propagation Studies," ElectroScience Laboratory, The Ohio State University Research Foundation.

Tonks, L. (1931), "Plasma-Electron Resonance, Plasma Resonance and Plasma Shape," Physical Review, 38, 1219.

Tonks, L. and Langmuir (1929), "Oscillations in Ionized Gases," Physical Review, 33, 195.

Turner, E. B. (1965), "Optical and Ultraviolet Techniques," Plasma Diagnostic Techniques, edited by R. H. Huddlestone and S. L. Leonard, Academic Press, New York.

Wiese, W. L. (1965), "Line Broadening," Plasma Diagnostic Techniques, edited by R. H. Huddlestone and S. L. Leonard, Academic Press, New York.

DOCUMENT CONTROL DATA - R & D

Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1 ORIGINATING ACTIVITY (Corporate author)	2a. REPORT SECURITY CLASSIFICATION
Colorado State University Department of Electrical Engineering Fort Collins, Colorado 80521	Unclassified
	2b. GROUP

3 REPORT TITLE

CAUSES, EFFECTS AND DIAGNOSTIC MEASUREMENTS OF THE REENTRY PLASMA SHEATH

4 DESCRIPTIVE NOTES (Type of report and inclusive dates)
Scientific.   Interim.

5 AUTHOR(S) (First name, middle initial, last name)

James P. Rybak

6 REPORT DATE	7a. TOTAL NO. OF PAGES	7b. NO. OF REFS
December 1970	69	84

8a. CONTRACT OR GRANT NO	9a. ORIGINATOR'S REPORT NUMBER(S)
F19628-70-C-0035 PROJECT THEMIS	
b. Project, Task, Work Unit Nos. 7260 n/a n/a	Scientific Report No. 1
c. DoD Element 61102F	9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)
d. DoD Subelement 681310	AFCRL-70-0707

10 DISTRIBUTION STATEMENT

1-This document has been approved for public release and sale; its distribution is unlimited.

11 SUPPLEMENTARY NOTES	12. SPONSORING MILITARY ACTIVITY
TECH., OTHER	Air Force Cambridge Research Laboratories L. G. Hanscom Field (LZ) Bedford, Massachusetts 01730

13 ABSTRACT

During entry into the earth's atmosphere of a manned or unmanned space vehicle, a plasma sheath envelops the vehicle because of shock heating of the ambient gases and ablation of the heat shield material. This plasma sheath causes the interruption of radio communications between the space vehicle and ground based stations commonly referred to as the reentry communications blackout. To solve the blackout problem, a knowledge of the reentry plasma sheath properties (electron density, electron collision frequency, electron temperature and plasma stand-off distance) is required. A summary of the causes and effects of the reentry plasma sheath is presented in this report together with a discussion of reentry plasma diagnostic techniques and review of the flight experiments performed to determine the properties of the reentry plasma.

DD FORM **1473**
(1 NOV)

14 KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Reentry						
Plasma Sheath						
Plasma Diagnostics						
Reentry Vehicles						